

# **AW-BTA03**

## **Bluetooth 5.2 Module For Automotive Application**

### **Design Guide**


**Rev. A**

## Revision History


Version	Revision Date	Description	Initials	Approved
A	2024/08/21	● Initial Version	YuFu Chen	NC Chen

## Reference Schematic

The VBAT pin must have capacitor C1 (0.1uF) placed as close as possible to the pin 36, 37.

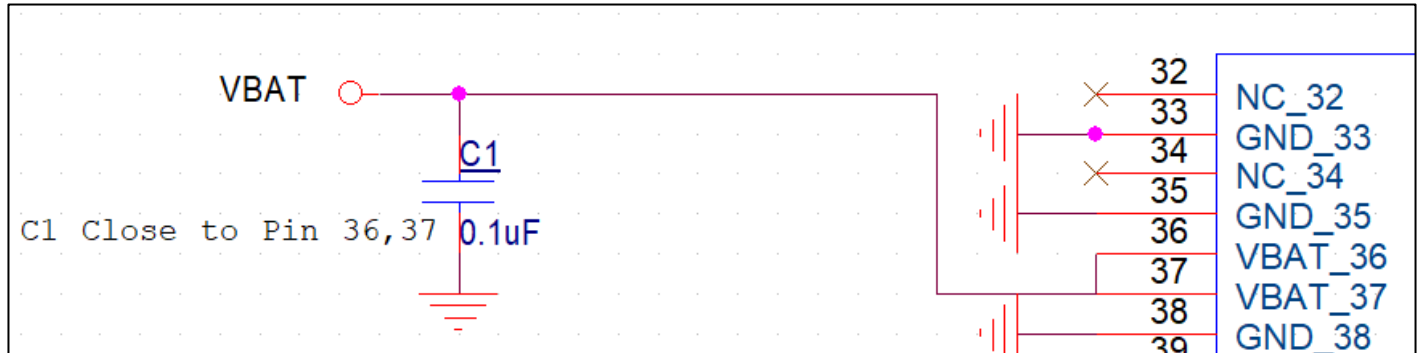

The VDDIO pin must have capacitor C2 (0.1uF) placed as close as possible to the pin 39.

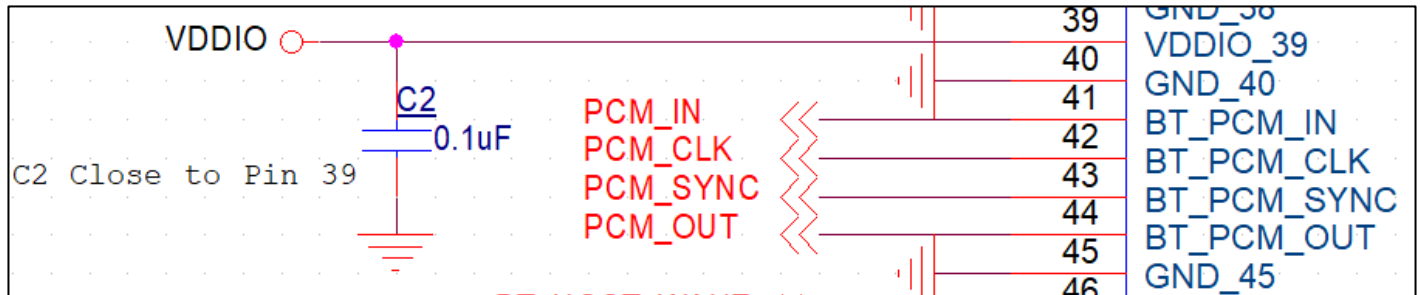

## Reference Schematic

