

# **AW-CU544**

**IEEE 802.11 b/g/n MAC/baseband/radio  
and Bluetooth 5.2 IoT Module**

## **Datasheet**

**Rev. A**

**DF**

**(For Standard PSoC62)**

## Features

### Wi-Fi

- Single band 2.4 GHz 802.11 b/g/n
- SDIO v2.0, including DS and HS modes
- Security—WEP, WPA/WPA2 (personal), WPA3, AES (HW), TKIP (HW), CKIP (SW), WMM/WMM-PS/WMM-SA
- Data Rate up to 72.2Mbps

### Bluetooth

- Supports extended Synchronous Connections (eSCO), for enhanced voice quality by allowing for retransmission of dropped packets
- Adaptive Frequency Hopping (AFH) for reducing radio frequency interference
- Maximum UART baud rates up to 4 Mbps
- Supports 5.0's LE Secure Connections
- Supports Bluetooth Core Specification version 5.2 + (Enhanced Data Rate) EDR features:
  - Adaptive Frequency Hopping (AFH)
  - Quality of Service (QoS)
  - Extended Synchronous Connections (eSCO) — Voice Connections
  - Fast Connect (interlaced page and inquiry scans)
  - Secure Simple Pairing (SSP)
  - Sniff Subrating (SSR)
  - Encryption Pause Resume (EPR)
  - Extended Inquiry Response (EIR)
  - Link Supervision Timeout (LST)
- Interface support – Host Controller Interface (HCI) using a high-speed UART interface and PCM for audio data

### MCU

- 150-MHz Arm Cortex-M4F CPU with single-cycle multiply (Floating Point and Memory

### Protection Unit)

- 100-MHz Cortex M0+ CPU
- 1 MB or 2MB Application Flash with 32-KB auxiliary flash (AUXflash), and 32-KB Supervisory Flash
- 288 KB or 1024 KB integrated SRAM
- OTP E-Fuse memory for validation and security
- Backup domain with 64 bytes of memory and Real-time Clock(RTC)
- 8 MHz Internal Main Oscillator (IMO) with 2% accuracy
- USB Full-Speed Dual-role Host and Device interface
- I2S Interface; up to 192 ksps Word Clock
- Two PDM channels for stereo digital microphones
- Execute-In-Place (XIP) from external Quad SPI Flash
- Supports 1, 2, 4, and Dual-Quad interfaces
- 12-bit SAR ADC (up to 2Msps) with differential and single-ended modes
- Infineon CapSense Sigma Delta (CSD) provides best-in-class SNR, liquid tolerance, and proximity sensing
- Mutual Capacitance sensing (Infineon CSX) with dynamic usage of both Self and Mutual sensing
- Automatic hardware tuning (SmartSense™)
- Hardware acceleration for Symmetric and Asymmetric cryptographic methods (AES,



3DES, RSA, and ECC) and Hash functions  
(SHA-512, SHA-256)

- Up to 66 programmable IOs

## Revision History

Document NO: R2-2544-DST-01

Version	Revision Date	DCN NO.	Description	Initials	Approved
A	2022/11/06	DCN025091	● Initial Version	Steven Jian	Chihhao Liao

## Table of Contents

<b>Revision History .....</b>	<b>4</b>
<b>1. Introduction .....</b>	<b>6</b>
<b>1.1 Product Overview .....</b>	<b>6</b>
1.1.1 Ordering Information .....	6
<b>1.2 Block Diagram .....</b>	<b>7</b>
1.2.1 AW-CU544-E-2X Block Diagram .....	7
1.2.2 AW-CU544-P-2X Block Diagram .....	8
<b>1.3 Specifications Table .....</b>	<b>9</b>
1.3.1 General.....	9
1.3.2 WLAN .....	9
1.3.3 Bluetooth .....	10
1.3.4 Operating Conditions .....	11
<b>2. Pin Definition .....</b>	<b>12</b>
<b>2.1 Pin Map .....</b>	<b>12</b>
<b>2.2 Pin Table .....</b>	<b>13</b>
<b>3. Electrical Characteristics .....</b>	<b>19</b>
<b>3.1 Absolute Maximum Ratings.....</b>	<b>19</b>
<b>3.2 Recommended Operating Conditions.....</b>	<b>19</b>
<b>3.3 GPIO DC Characteristics.....</b>	<b>20</b>
<b>3.4 Host Interface .....</b>	<b>21</b>
3.4.1 PCM Interface Timing (CYW43439).....	21
<b>3.5 Power Consumption.....</b>	<b>25</b>
3.5.1 WLAN & MCU .....	25
3.5.2 Bluetooth & MCU .....	26
<b>4. Mechanical Information .....</b>	<b>27</b>
<b>4.1 AW-CU544-E-2X Mechanical Drawing .....</b>	<b>27</b>
<b>4.2 AW-CU544-P-2X Mechanical Drawing .....</b>	<b>29</b>
<b>5. Packaging Information.....</b>	<b>31</b>

## 1. Introduction

### 1.1 Product Overview

AzureWave presents AW-CU544-PSoC62 Wi-Fi & Bluetooth with Microcontroller solution which provides a highly cost-effective, flexible and easy to-use hardware/software platform to build a new generation of connected, smart devices. These smart-connected devices enable device to deliver a broad-range of services to consumers including energy-management, demand-response, home automation and remote access. This allows a user to manage comfort and convenience, also run diagnostics and receive alerts and notifications, in addition to managing and controlling the device. Developers can leverage the rich connectivity features of these new smart devices to create a new generation of innovative new applications and services.

The AW-CU544-PSoC62 offers the lowest RBOM. In addition, it integrates a power amplifier (PA) that meets the output power requirements of most handheld systems, a low-noise amplifier (LNA) for best-in-class receiver sensitivity, and an internal transmit/receive (iTR) RF switch, further reducing the overall solution cost and printed circuit board area. The AW-CU544-PSoC62 implements the world's most advanced Enhanced Collaborative Coexistence algorithms and hardware mechanisms, allowing for an extremely collaborative WLAN and Bluetooth coexistence. The Microcontroller is a combination of a dual-core microcontroller with low-power Flash technology and digital programmable logic, high-performance analog-to-digital and digital-to-analog conversion, low-power comparators, and standard communication and timing peripherals.


#### 1.1.1 Ordering Information

##### Planned versions:


Model Name	MCU	Antenna
AW-CU544-E-21	1MB flash, 288KB SRAM, op-amp, DAC, 1Msps ADC	External Antenna
AW-CU544-E-22	2MB flash, 1MB SRAM, 2Msps ADC	External Antenna
AW-CU544-P-21	1MB flash, 288KB SRAM, op-amp, DAC, 1Msps ADC	PCB Antenna
AW-CU544-P-22	2MB flash, 1MB SRAM, 2Msps ADC	PCB Antenna

## 1.2 Block Diagram

### 1.2.1 AW-CU544-E-2X Block Diagram

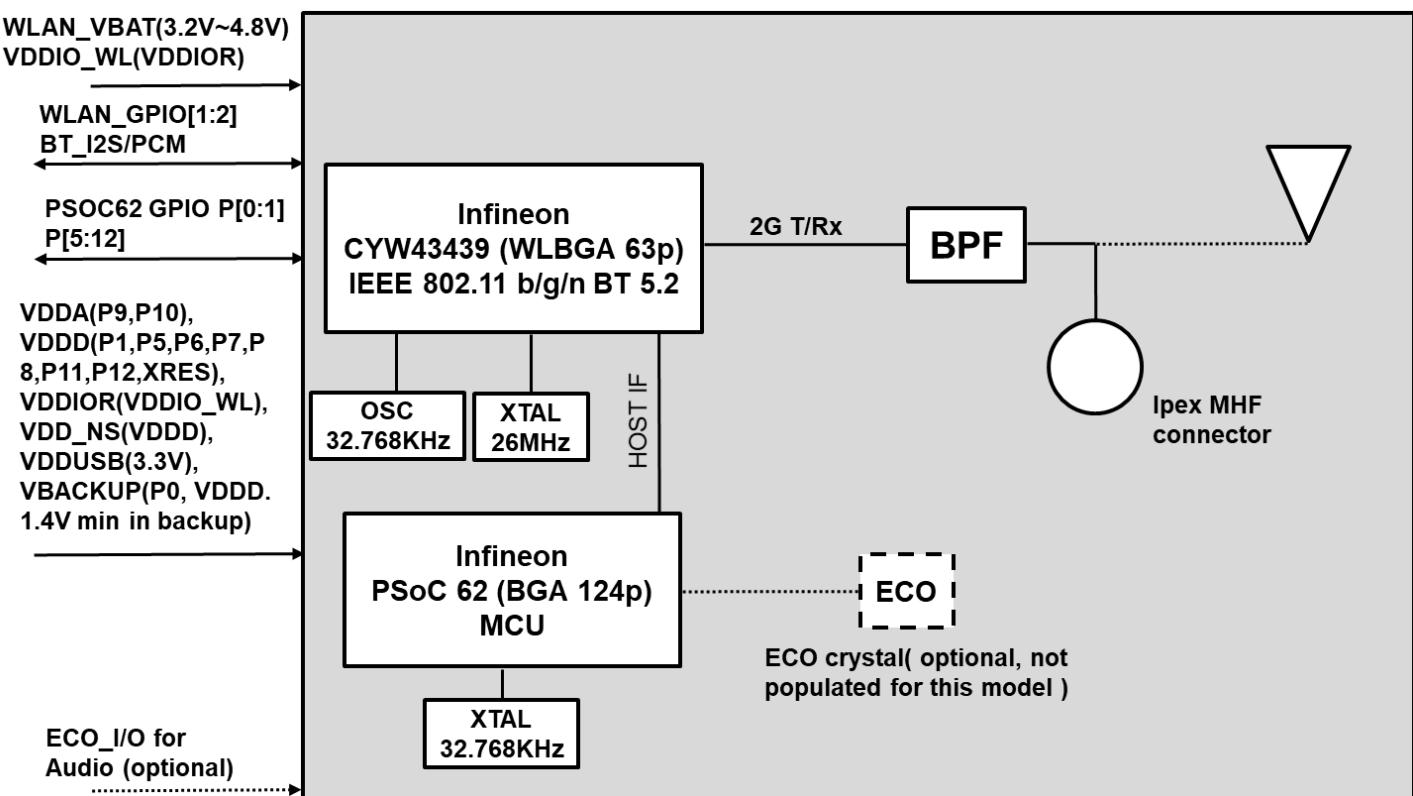

### 1.2.2 AW-CU544-P-2X Block Diagram

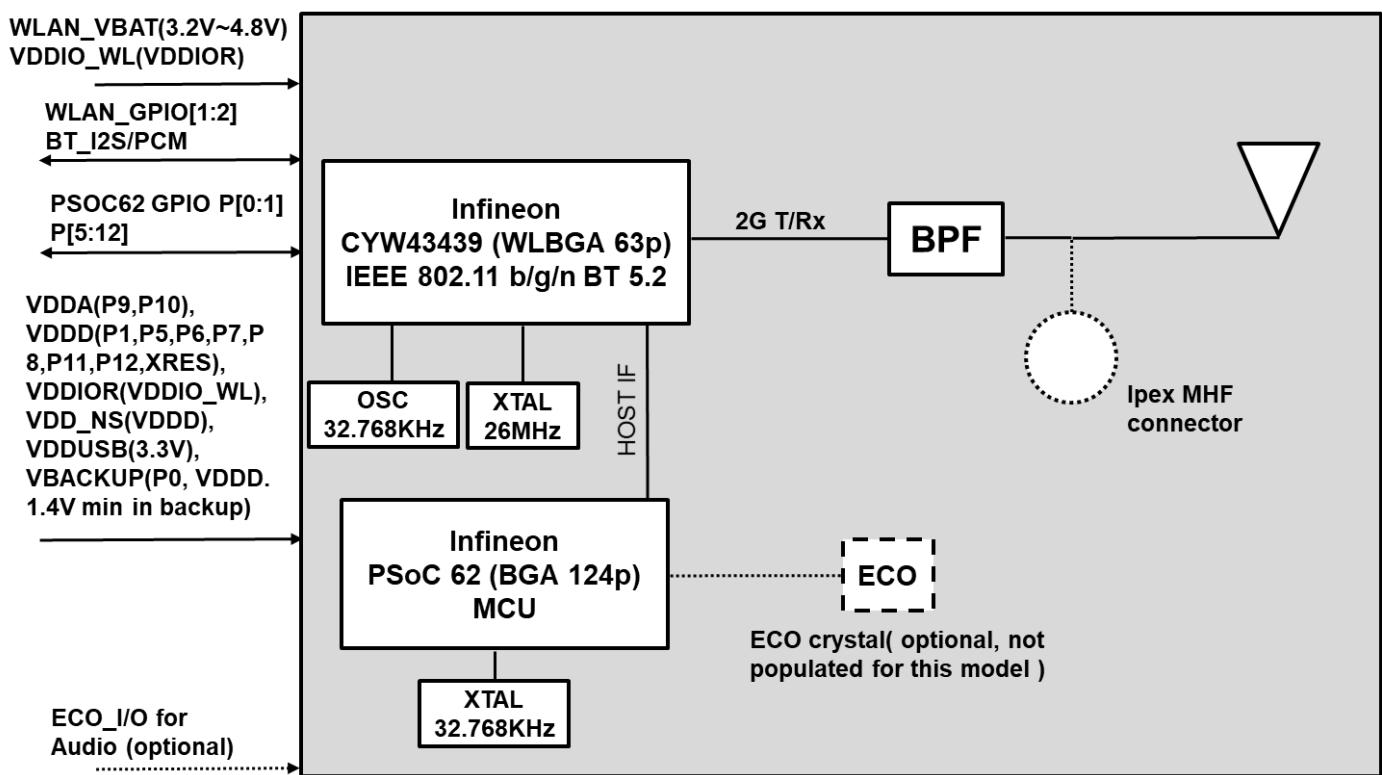

\*Support different HW configurations. Please contact AzureWave for the details.

## 1.3 Specifications Table

### 1.3.1 General

Features	Description
<b>Product Description</b>	IEEE 802.11 b/g/n Wireless LAN and Bluetooth IoT Module
<b>Major Chipset</b>	Infineon CYW43439 (WLBGA 63p), PSoC 62 (BGA 124p)(1MB Flash:CY8C6247,2MB Flash: CY8C624A)
<b>Host Interface</b>	SPI/UART/SDIO/USB/I2C/I2S
<b>Dimension</b>	36.0mm(L) x 18mm(W) x 2.8mm(H)
<b>Package</b>	LGA Module, 146p
<b>Antenna</b>	AW-CU544-E-2X: IPEX MHF Receptacle(refer to 4.1 AW-CU544-E-2X Mechanical Drawing) AW-CU544-P-2X: Internal PCB antenna ANT: Wi-Fi/Bluetooth → TX/RX
<b>Weight</b>	2.3g

### 1.3.2 WLAN

Features	Description
<b>WLAN Standard</b>	IEEE 802.11b/g/n, Wi-Fi compliant
<b>WLAN VID/PID</b>	n/a
<b>WLAN SVID/SPID</b>	n/a
<b>Frequency Range</b>	WLAN: 2.4 GHz Band
<b>Modulation</b>	DSSS DBPSK(1Mbps), DQPSK(2Mbps), CCK(11/5.5Mbps) OFDM BPSK(9/6Mbps), QPSK(18/12Mbps), DBPSK(1Mbps), DQPSK(2Mbps), CCK(11/5.5Mbps), 16-QAM(36/24Mbps), 64-QAM (72.2/54/48Mbps)
<b>Number of Channels</b>	802.11b: USA, Canada and Taiwan – 1 ~ 11 Most European Countries – 1 ~ 13 Japan – 1 ~ 13 802.11g:

	USA and Canada – 1 ~ 11 Most European Countries – 1 ~ 13 802.11n: USA and Canada – 1 ~ 11 Most European Countries – 1 ~ 13																																			
<b>Output Power (Board Level Limit)*</b>	<b>2.4G</b> <table border="1"> <thead> <tr> <th></th><th>Min</th><th>Typ</th><th>Max</th><th>Unit</th></tr> </thead> <tbody> <tr> <td>11b (11Mbps) @EVM&lt;35%</td><td>17</td><td>19</td><td>21</td><td>dBm</td></tr> <tr> <td>11g (54Mbps) @EVM<math>\leq</math>-25 dB</td><td>16</td><td>18</td><td>20</td><td>dBm</td></tr> <tr> <td>11n (HT20 MCS7) @EVM<math>\leq</math>-27 dB</td><td>15.5</td><td>17.5</td><td>19.5</td><td>dBm</td></tr> </tbody> </table>		Min	Typ	Max	Unit	11b (11Mbps) @EVM<35%	17	19	21	dBm	11g (54Mbps) @EVM $\leq$ -25 dB	16	18	20	dBm	11n (HT20 MCS7) @EVM $\leq$ -27 dB	15.5	17.5	19.5	dBm															
	Min	Typ	Max	Unit																																
11b (11Mbps) @EVM<35%	17	19	21	dBm																																
11g (54Mbps) @EVM $\leq$ -25 dB	16	18	20	dBm																																
11n (HT20 MCS7) @EVM $\leq$ -27 dB	15.5	17.5	19.5	dBm																																
<b>Receiver Sensitivity</b>	<b>2.4G</b> <table border="1"> <thead> <tr> <th></th><th>Min</th><th>Typ</th><th>Max</th><th>Unit</th></tr> </thead> <tbody> <tr> <td>11b (1Mbps)</td><td></td><td>-97</td><td>-93</td><td>dBm</td></tr> <tr> <td>11g (6Mbps)</td><td></td><td>-91</td><td>-87</td><td>dBm</td></tr> <tr> <td>11b (11Mbps)</td><td></td><td>-89</td><td>-85</td><td>dBm</td></tr> <tr> <td>11g (54Mbps)</td><td></td><td>-76</td><td>-72</td><td>dBm</td></tr> <tr> <td>11n (HT20 MCS0)</td><td></td><td>-91</td><td>-87</td><td>dBm</td></tr> <tr> <td>11n (HT20 MCS7)</td><td></td><td>-73</td><td>-69</td><td>dBm</td></tr> </tbody> </table>		Min	Typ	Max	Unit	11b (1Mbps)		-97	-93	dBm	11g (6Mbps)		-91	-87	dBm	11b (11Mbps)		-89	-85	dBm	11g (54Mbps)		-76	-72	dBm	11n (HT20 MCS0)		-91	-87	dBm	11n (HT20 MCS7)		-73	-69	dBm
	Min	Typ	Max	Unit																																
11b (1Mbps)		-97	-93	dBm																																
11g (6Mbps)		-91	-87	dBm																																
11b (11Mbps)		-89	-85	dBm																																
11g (54Mbps)		-76	-72	dBm																																
11n (HT20 MCS0)		-91	-87	dBm																																
11n (HT20 MCS7)		-73	-69	dBm																																
<b>Data Rate</b>	802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0~7 HT20																																			
<b>Security</b>	<ul style="list-style-type: none"> <li>◆ WPA™- and WPA2™- (Personal) support for powerful encryption and authentication</li> <li>◆ WPA3</li> <li>◆ AES and TKIP acceleration hardware for faster data encryption and 802.11i compatibility</li> <li>◆ Cisco® Compatible Extension- (CCX, CCX 2.0, CCX 3.0, CCX 4.0, CCX5.0) certified</li> <li>◆ Wi-Fi Protected Setup (WPS)</li> <li>◆ WEP</li> <li>◆ WMM / WMM-SA</li> <li>◆ CKIP(Software)</li> </ul>																																			

### 1.3.3 Bluetooth

Features	Description
<b>Bluetooth Standard</b>	Bluetooth 2.1+Enhanced Data Rate (EDR) /Core Specification 5.2
<b>Bluetooth VID/PID</b>	n/a


<b>Frequency Range</b>	2400~2483.5MHz				
<b>Modulation</b>	GFSK (1Mbps), Π/4DQPSK (2Mbps) and 8DPSK (3Mbps)				
<b>Output Power</b>	Basic Rate : 8dBm +/- 3dBm (Max Settings) BLE:8dBm+/-3dBm(Max Settings)				
<b>Receiver Sensitivity</b>		Min	Typ	Max	Unit
	DH5		-91	-76	dBm
	2DH5		-93	-79	dBm
	3DH5		-87	-73	dBm

### 1.3.4 Operating Conditions

<b>Features</b>	<b>Description</b>
<b>Operating Conditions</b>	
<b>Voltage</b>	WIFI/BT VBAT:3.2V~4.8V (3.6V Typical) VDD for MCU(except for USB):1.7V~3.6V
<b>Operating Temperature</b>	-30°C to 85°C (Optimal RF performance guarantee -30°C to 80°C)
<b>Operating Humidity</b>	less than 85% R.H.
<b>Storage Temperature</b>	-40°C to 90°C
<b>Storage Humidity</b>	less than 60% R.H.
<b>ESD Protection</b>	
<b>Human Body Model</b>	±1KV per MIL-STD-883H Method 3015.8
<b>Charged Device Model</b>	±300V per JEDEC EIA/JESD22-C101E

## 2. Pin Definition

### 2.1 Pin Map

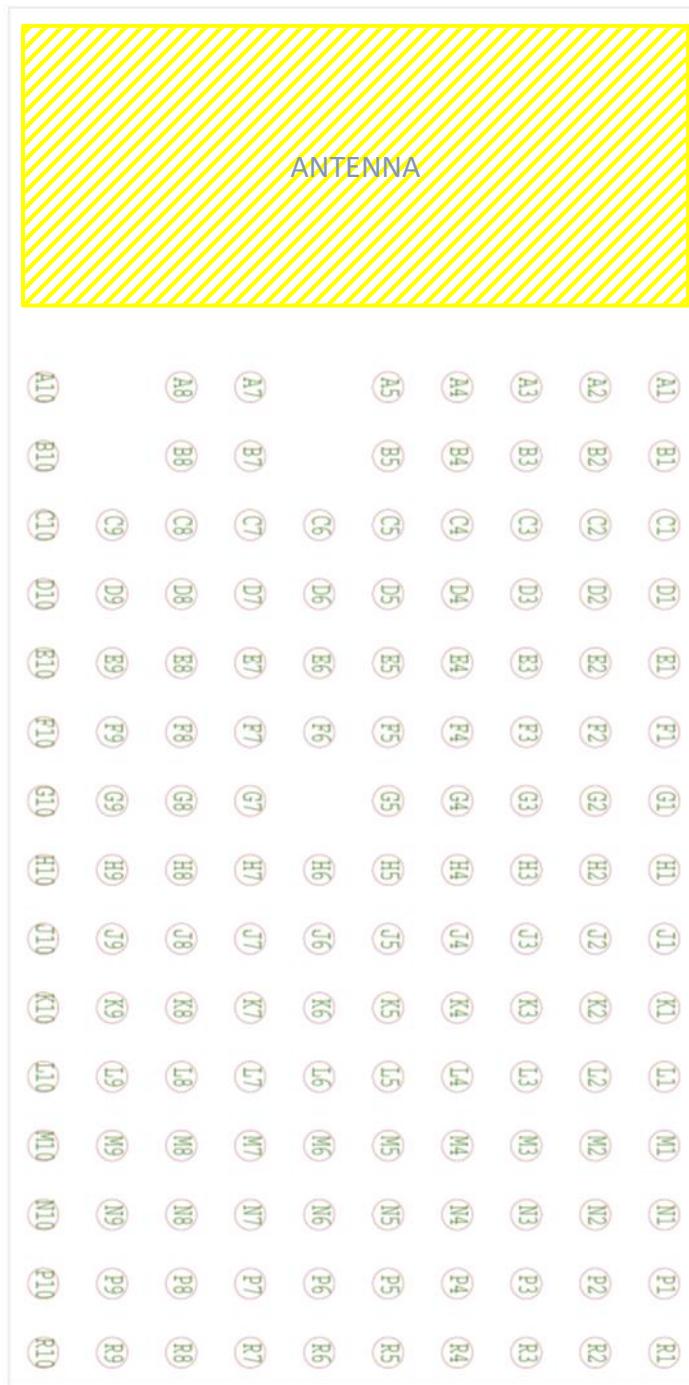

**AW-CU544-PSoC62 Top View Pin Map**

## 2.2 Pin Table

Pin No	Definition	Basic Description	Voltage	Type
G3	BT_PCM_CLK/I2S_CLK	PCM or I2S clock; can be master (output) or slave (input)	VDDIO_WL	I/O
D3	BT_PCM_IN/I2S_DI	PCM or I2S data input sensing	VDDIO_WL	I
E3	BT_PCM_OUT/I2S_DO	PCM or I2S data output	VDDIO_WL	O
F3	BT_PCM_SYNC/I2S_WS	PCM SYNC or I2S_WS; can be master (output) or slave (input)	VDDIO_WL	I/O
D5	BT_REG_ON	Reserved for debug use only	VDDIO_WL	I
B1	BT_UART_CTS	Reserved for debug use only	VDDIO_WL	I
D2	BT_UART_RTS	Reserved for debug use only	VDDIO_WL	O
C2	BT_UART_RXD	Reserved for debug use only	VDDIO_WL	I
B2	BT_UART_TXD	Reserved for debug use only	VDDIO_WL	O
N5	ECO_IN_MODULE	PSoC 62 ECO in (optional),connected to P12_6 internally		I
N4	ECO_OUT_MODULE	PSoC 62 ECO out (optional) ,connected to P12_7 internally		O
A1	GND_A1	Ground.		GND
A10	GND_A10	Ground.		GND
A2	GND_A2	Ground.		GND
A3	GND_A3	Ground.		GND
A4	GND_A4	Ground.		GND
A5	GND_A5	Ground.		GND
A7	GND_A7	Ground.		GND
A8	GND_A8	Ground.		GND
B10	GND_B10	Ground.		GND
B3	GND_B3	Ground.		GND
B7	GND_B7	Ground.		GND

B8	GND_B8	Ground.		GND
C10	GND_C10	Ground.		GND
C3	GND_C3	Ground.		GND
C6	GND_C6	Ground.		GND
C7	GND_C7	Ground.		GND
C8	GND_C8	Ground.		GND
C9	GND_C9	Ground.		GND
D1	GND_D1	Ground.		GND
D7	GND_D7	Ground.		GND
D8	GND_D8	Ground.		GND
D9	GND_D9	Ground.		GND
E2	GND_E2	Ground.		GND
E5	GND_E5	Ground.		GND
F2	GND_F2	Ground.		GND
F6	GND_F6	Ground.		GND
F9	GND_F9	Ground.		GND
G1	GND_G1	Ground.		GND
G2	GND_G2	Ground.		GND
G7	GND_G7	Ground.		GND
H10	GND_H10	Ground.		GND
H3	GND_H3	Ground.		GND
H8	GND_H8	Ground.		GND
J8	GND_J8	Ground.		GND
J9	GND_J9	Ground.		GND
K2	GND_K2	Ground.		GND
K4	GND_K4	Ground.		GND

K5	GND_K5	Ground.		GND
K8	GND_K8	Ground.		GND
L1	GND_L1	Ground.		GND
L5	GND_L5	Ground.		GND
L7	GND_L7	Ground.		GND
N3	GND_N3	Ground.		GND
P3	GND_P3	Ground.		GND
P6	GND_P6	Ground.		GND
P8	GND_P8	Ground.		GND
R9	GND_R9	Ground.		GND
K6	P0_2	PSoC 62 P0.2	VBACK UP	I/O
J7	P0_3	PSoC 62 P0.3	VBACK UP	I/O
K7	P0_4	PSoC 62 P0.4	VBACK UP	I/O
J6	P0_5	PSoC 62 P0.5	VBACK UP	I/O
M2	P1_0	PSoC 62 P1.0	VDDD	I/O
M3	P1_1	PSoC 62 P1.1	VDDD	I/O
K3	P1_2	PSoC 62 P1.2	VDDD	I/O
L3	P1_3	PSoC 62 P1.3	VDDD	I/O
L2	P1_4	PSoC 62 P1.4	VDDD	I/O
J3	P1_5	PSoC 62 P1.5	VDDD	I/O
R7	P10_0	PSoC 62 P10.0	VDDA	I/O
R6	P10_1	PSoC 62 P10.1	VDDA	I/O
P7	P10_2	PSoC 62 P10.2	VDDA	I/O
L6	P10_3	PSoC 62 P10.3	VDDA	I/O
N7	P10_4	PSoC 62 P10.4	VDDA	I/O

M7	P10_5	PSoC 62 P10.5	VDDA	I/O
M6	P10_6	PSoC 62 P10.6	VDDA	I/O
R4	P11_0	PSoC 62 P11.0	VDDD	I/O
L4	P11_1	PSoC 62 P11.1	VDDD	I/O
R5	P11_2	PSoC 62 P11.2	VDDD	I/O
N6	P11_3	PSoC 62 P11.3	VDDD	I/O
M4	P11_4	PSoC 62 P11.4	VDDD	I/O
P4	P11_5	PSoC 62 P11.5	VDDD	I/O
P5	P11_6	PSoC 62 P11.6	VDDD	I/O
M5	P11_7	PSoC 62 P11.7	VDDD	I/O
R2	P12_0	PSoC 62 P12.0	VDDD	I/O
R1	P12_1	PSoC 62 P12.1	VDDD	I/O
N1	P12_2	PSoC 62 P12.2	VDDD	I/O
P1	P12_3	PSoC 62 P12.3	VDDD	I/O
P2	P12_4	PSoC 62 P12.4	VDDD	I/O
N2	P12_5	PSoC 62 P12.5	VDDD	I/O
C4	P5_0	PSoC 62 P5.0	VDDD	I/O
F4	P5_1	PSoC 62 P5.1	VDDD	I/O
E4	P5_2	PSoC 62 P5.2	VDDD	I/O
F5	P5_3	PSoC 62 P5.3	VDDD	I/O
D4	P5_4	PSoC 62 P5.4	VDDD	I/O
B5	P5_5	PSoC 62 P5.5	VDDD	I/O
B4	P5_6	PSoC 62 P5.6	VDDD	I/O
C5	P5_7	PSoC 62 P5.7	VDDD	I/O
F7	P6_0	PSoC 62 P6.0	VDDD	I/O
E7	P6_1	PSoC 62 P6.1	VDDD	I/O

E8	P6_2	PSoC 62 P6.2	VDDD	I/O
G8	P6_3	PSoC 62 P6.3	VDDD	I/O
F8	P6_4	PSoC 62 P6.4	VDDD	I/O
E9	P6_5	PSoC 62 P6.5	VDDD	I/O
E10	P6_6	PSoC 62 P6.6	VDDD	I/O
D10	P6_7	PSoC 62 P6.7	VDDD	I/O
F10	P7_0	PSoC 62 P7.0	VDDD	I/O
H9	P7_3	PSoC 62 P7.3	VDDD	I/O
G9	P7_4	PSoC 62 P7.4	VDDD	I/O
G10	P7_5	PSoC 62 P7.5	VDDD	I/O
J10	P8_0	PSoC 62 P8.0	VDDD	I/O
K9	P8_1	PSoC 62 P8.1	VDDD	I/O
L8	P8_2	PSoC 62 P8.2	VDDD	I/O
K10	P8_3	PSoC 62 P8.3	VDDD	I/O
L9	P8_4	PSoC 62 P8.4	VDDD	I/O
M8	P8_5	PSoC 62 P8.5	VDDD	I/O
L10	P8_6	PSoC 62 P8.6	VDDD	I/O
M9	P8_7	PSoC 62 P8.7	VDDD	I/O
P9	P9_0	PSoC 62 P9.0	VDDA	I/O
N9	P9_1	PSoC 62 P9.1	VDDA	I/O
M10	P9_2	PSoC 62 P9.2	VDDA	I/O
N8	P9_3	PSoC 62 P9.3	VDDA	I/O
P10	P9_4	PSoC 62 P9.4	VDDA	I/O
N10	P9_5	PSoC 62 P9.5	VDDA	I/O
R10	P9_6	PSoC 62 P9.6	VDDA	I/O
H4	SDIO_CLK_TP	Floating Pin, No connect to anything.		Floating

G5	SDIO_CMD_TP	Floating Pin, No connect to anything.		Floating
H5	SDIO_DATA0_TP	Floating Pin, No connect to anything.		Floating
G4	SDIO_DATA1_TP	Floating Pin, No connect to anything.		Floating
H7	SDIO_DATA2_TP	Floating Pin, No connect to anything.		Floating
H6	SDIO_DATA3_TP	Floating Pin, No connect to anything.		Floating
J4	USBDM	PSoC 62 USB D-	3.3V	I/O
J5	USBDP	PSoC 62 USB D+	3.3V	I/O
M1	VBACKUP	VBACKUP is the supply to the backup domain. The backup domain includes the 32-kHz WCO, RTC, and backup registers. It can generate a wake-up interrupt to the chip via the RTC timers or an external input. It can also generate an output to wakeup external circuitry. It is connected to VDDD when not used as a separate battery backup domain. VBACKUP provides the supply for Port 0. Min. is 1.4 V in Backup Mode		PWR
K1	VDD_NS	Power Supply for PSoC 62 Buck regulator	VDDD	PWR
H2	VDD_USB	Power Supply for PSoC 62 USB	3.3V	PWR
R8	VDDA	Power Supply for PSoC 62 P9,P10 (analog peripherals)	1.7~3.6 V	PWR
R3	VDDD	Power Supply for PSoC 62 P1, P5, P6, P7, P8, P11, P12, XRES. A one-time-programmable (OTP) eFuse array consists of 1024 bits, all of which are reserved for system use. The bits are used for storing hash values, unique IDs, or other similar content in the PSoC 62 Secure MCUs. Each fuse is individually programmed; once programmed (or “blown”), its state cannot be changed. <b>To program the eFuse, VDDD must be at 2.5 V ±5%, at 14 mA.</b>	1.7~3.6 V	PWR
H1	VDDIO_WL	Power Supply for CYW43439 Digital I/O. Connect it to VDDIOR.	VDDIO_R	PWR
J1	VDDIOR	Power Supply for PSoC 62 P2, P3, P4. Connect it to VDDIO_WL	1.8V	PWR
D6	WL_GPIO1	Reserved for debug use only	VDDIO_WL	I/O
E6	WL_GPIO2	Reserved for debug use only	VDDIO_WL	I/O

C1	WL_REG_ON	Reserved for debug use only	VDDIO_WL	I
F1	WLAN_VBAT	Main Power Supply for CYW43439	3.2~4.8 V	PWR
E1	WLAN_VBAT	Main Power Supply for CYW43439	3.2~4.8 V	PWR
J2	XRES_L	External reset I/O pin(pulled up by a 4.7K ohms resistor internally)	VDDD	I

### 3. Electrical Characteristics

#### 3.1 Absolute Maximum Ratings

Symbol	Parameter	Minimum	Typical	Maximum	Unit
WLAN_VBAT	Power supply for CYW43439 PMU	-0.5		6	V
VDDD,VDDIOR,VD_D_NS,VDDA,VDD_	Power Supply for PSoC 62	-0.5		4	V
VDDIO_WL	Power supply for CYW43439 digital I/O	-0.5		3.9	V

#### 3.2 Recommended Operating Conditions

Symbol	Parameter	Minimum	Typical	Maximum	Unit
WLAN_VBAT	Power supply for CYW43439 PMU	3.2	3.6	4.8	V
VDDD <sup>1</sup> ,VDD_NS,VD_DA	Power Supply for PSoC 62	1.7		3.6	V
VDDIO_WL, VDDIOR	IO Voltage for WLAN/BT & PSoC 62 <sup>2</sup>	1.7	1.8	1.9	V
VDD_USB	Power Supply for PSoC 62 USB	3.15	3.3	3.6	V
VBACKUP	Power supply to the PSoC 62 backup domain	1.4		3.6	V

<sup>1</sup> To program the eFuse, VDDD must be at 2.5 V ±5%, at 14 mA

<sup>2</sup> Performance not guarantee if VDDIO\_WL, VDDIOR >1.9V


### 3.3 GPIO DC Characteristics

Symbol	Parameter	Condition	Min	Typ	Max	Units
$V_{IH}$	Input high voltage	CMOS Input	0.7*VDD			V
$V_{IL}$	Input low voltage	CMOS Input			0.3*VDD	V
$V_{IH}$	Input high voltage	LV TTL input, VDD < 2.7 V	0.7*VDD			V
$V_{IL}$	Input low voltage	LV TTL input, VDD < 2.7 V			0.3*VDD	V
$V_{IH}$	Input high voltage	LV TTL input, VDD $\geq$ 2.7 V	2			V
$V_{IL}$	Input low voltage	LV TTL input, VDD $\geq$ 2.7 V			0.8	V
$V_{OH}$	Output High Voltage	$IOH = 8 \text{ mA}$	VDD-0.5			V
$V_{OL}$	Output Low Voltage	$IOL = 8 \text{ mA}$			0.4	V

\*please find the details @ <https://www.infineon.com/cms/en/product/microcontroller/32-bit-psoc-arm-cortex-microcontroller/psoc-6-32-bit-arm-cortex-m4-mcu/psoc-62/>


### 3.4 Host Interface

#### 3.4.1 PCM Interface Timing (CYW43439)

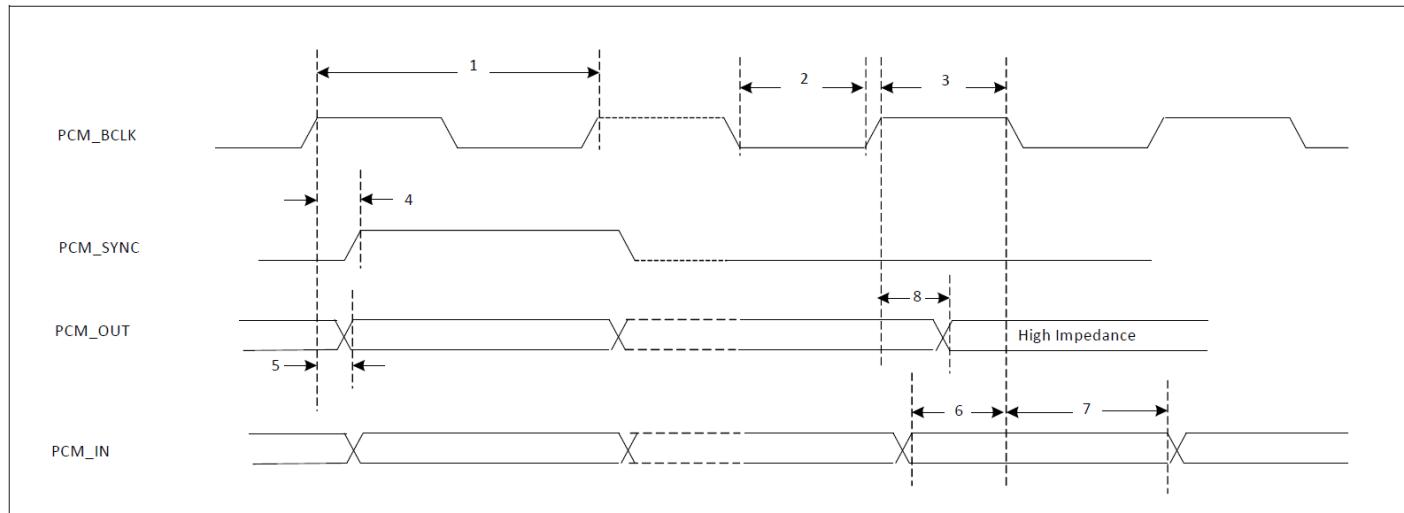


PCM Timing Diagram (Short Frame Sync, Master Mode)

	Reference Characteristics	Minimum	Typical	Maximum	Unit
<b>1</b>	PCM bit clock frequency			12	MHz
<b>2</b>	PCM bit clock low	41			ns
<b>3</b>	PCM bit clock high	41			ns
<b>4</b>	PCM_SYNC delay	0		25	ns
<b>5</b>	PCM_OUT delay	0		25	ns
<b>6</b>	PCM_IN setup	8			ns
<b>7</b>	PCM_IN hold	8			ns
<b>8</b>	Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance	0		25	ns

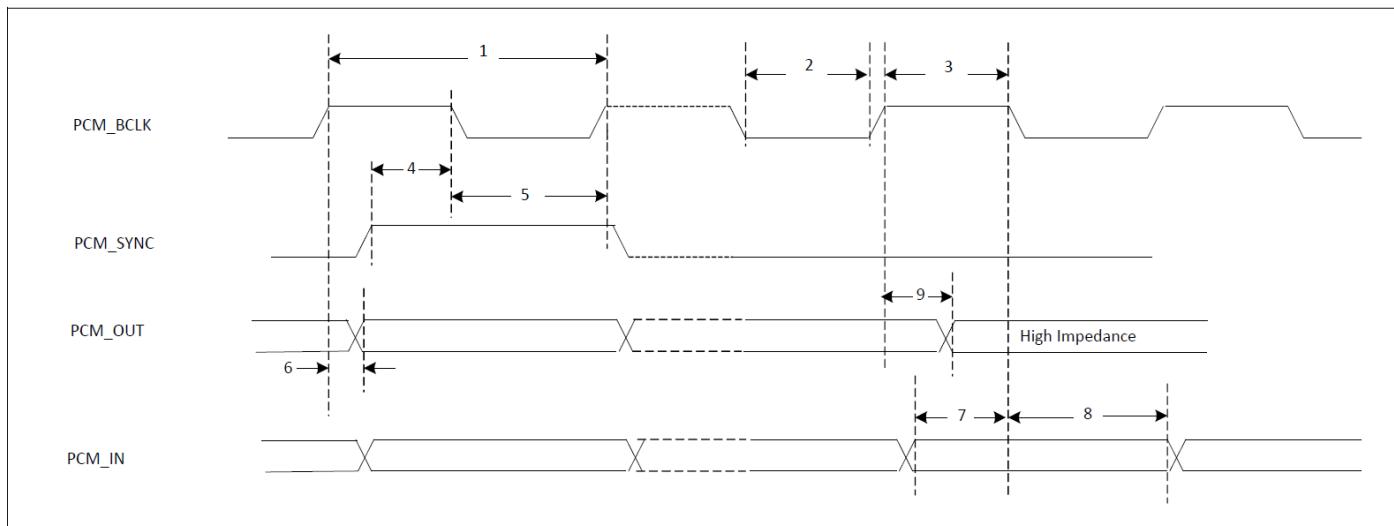


**PCM Timing Diagram (Short Frame Sync, Slave Mode)**

	Reference Characteristics	Minimum	Typical	Maximum	Unit
<b>1</b>	PCM bit clock frequency			12	MHz
<b>2</b>	PCM bit clock low	41			ns
<b>3</b>	PCM bit clock high	41			ns
<b>4</b>	PCM_SYNC setup	8			ns
<b>5</b>	PCM_SYNC hold	8			ns
<b>6</b>	PCM_OUT delay	0		25	ns
<b>7</b>	PCM_IN setup	8			ns
<b>8</b>	PCM_IN hold	8			ns
<b>9</b>	Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance	0		25	ns

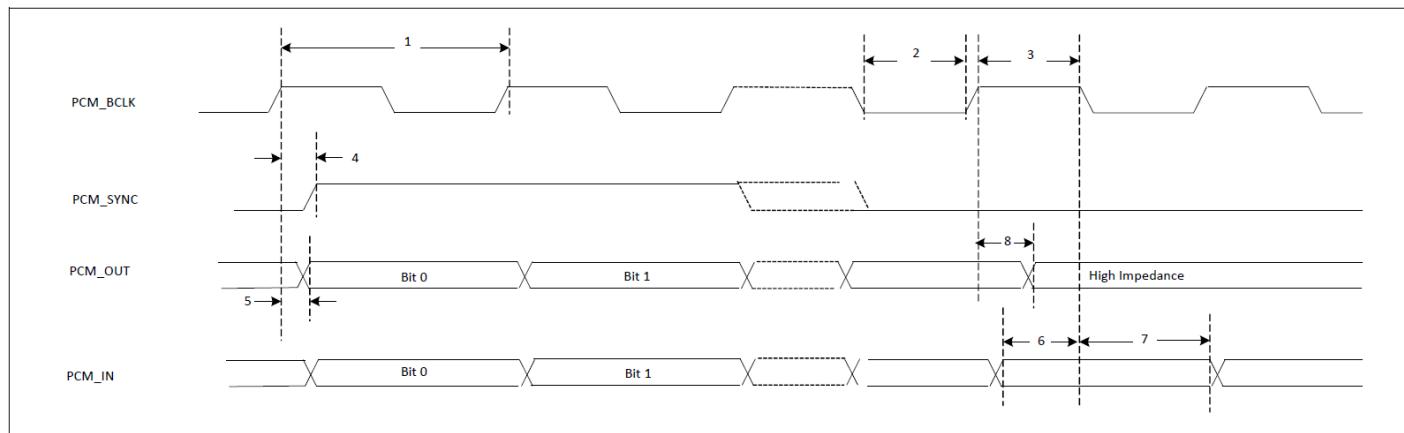

**PCM Timing Diagram (Long Frame Sync, Master Mode)**

	Reference Characteristics	Minimum	Typical	Maximum	Unit
<b>1</b>	PCM bit clock frequency			12	MHz
<b>2</b>	PCM bit clock low	41			ns
<b>3</b>	PCM bit clock high	41			ns
<b>4</b>	PCM_SYNC delay	0		25	ns
<b>5</b>	PCM_OUT delay	0		25	ns
<b>6</b>	PCM_IN setup	8			ns
<b>7</b>	PCM_IN hold	8			ns
<b>8</b>	Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance	0		25	ns

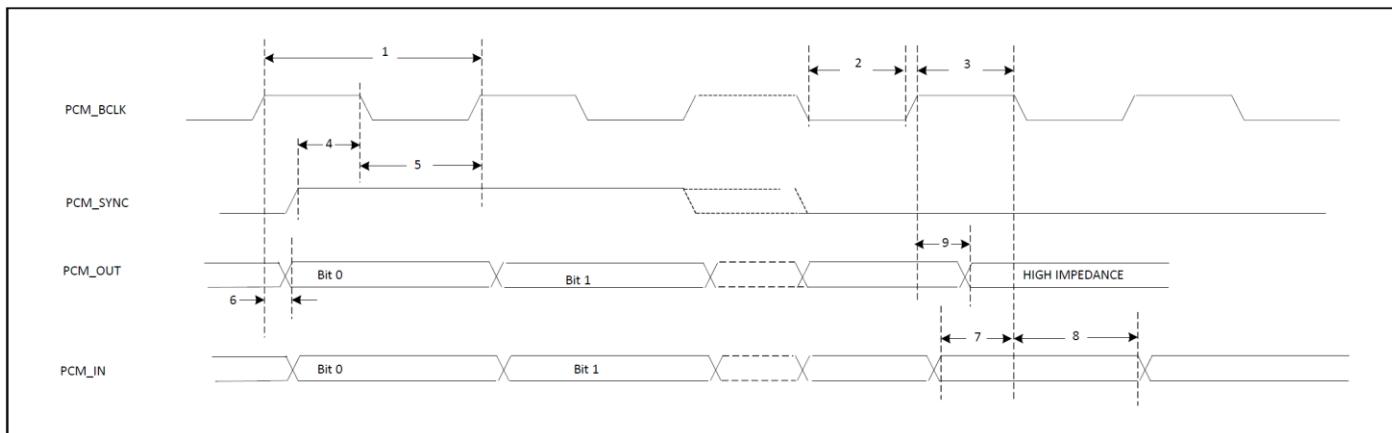

**PCM Timing Diagram (Long Frame Sync, Slave Mode)**

	<b>Reference Characteristics</b>	<b>Minimum</b>	<b>Typical</b>	<b>Maximum</b>	<b>Unit</b>
<b>1</b>	PCM bit clock frequency			12	MHz
<b>2</b>	PCM bit clock low	41			ns
<b>3</b>	PCM bit clock high	41			ns
<b>4</b>	PCM_SYNC setup	8			ns
<b>5</b>	PCM_SYNC hold	8			ns
<b>6</b>	PCM_OUT delay	0		25	ns
<b>7</b>	PCM_IN setup	8			ns
<b>8</b>	PCM_IN hold	8			ns
<b>9</b>	Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance	0		25	ns

### 3.5 Power Consumption

#### 3.5.1 WLAN & MCU

No.	Item	WLAN_VBAT (3.6V)	VDDIO_WL (1.8V)	VDDIOR (1.8V)	VDDD (3.3V)			
		Avg. (mA)	Avg. (uA)	Avg. (uA)	Avg. (mA)			
<b>MCU (Internal buck), WLAN OFF, Bluetooth OFF</b>								
1	System/CPU Deep Sleep <sup>(1)(5)</sup>							
<b>MCU (Internal LDO), Bluetooth OFF</b>								
1	WLAN OFF <sup>(1)</sup>							
2	WLAN Sleep <sup>(2)</sup> (Not associated with AP)							
3	WLAN Power Save (2.4GHz) <sup>(2)(4)</sup>							
Band (GHz)	Mode	BW (MHz)	RF Power (dBm)	Transmit				
				Avg. (mA)	Duty (%)	Avg. (uA)	Avg. (uA)	Avg. (mA)
2.4	11b@1Mbps <sup>(3)</sup>	20	19					
	11g@54Mbps <sup>(3)</sup>	20	17					
	11n@MCS7 <sup>(3)</sup>	20	16.5					
Band (GHz)	Mode	BW(MHz)		Receive				
				Avg. (mA)	Avg. (uA)	Avg. (uA)	Avg. (mA)	
2.4	11b@1Mbps <sup>(3)</sup>	20						
	11g54Mbps <sup>(3)</sup>	20						
	11n@MCS7 <sup>(3)</sup>	20						

Note:

(1) WLAN and Bluetooth off (WL\_REG\_ON=LOW, BT\_REG\_ON =LOW)

(2) Using normal firmware.

(3) Using MFG firmware.

(4) Link AP use ASUS RT-AC66U, DTIM = 1, Beacon Interval = 100 ms

Command:

```
#scan
#join <SSID> open
#set_data_rate 1
#get_data_rate
```

#wifi\_powersave 1  
 (5) Remove Jumper J29


### 3.5.2 Bluetooth & MCU


No.	Mode	Packet Type	RF Power (dBm)	<b>WLAN_VBAT (3.6 V)</b>	<b>VDDIO_WL (1.8 V)</b>	<b>VDDIOR (1.8 V)</b>	<b>VDDD (3.3 V)</b>
				Avg.(mA)	Avg.(uA)	Avg.(uA)	Avg.(mA)
1	Sleep	n/a	n/a				
2	Transmit	DH5 / 3-DH5	8				
3	Receive	DH5 / 3-DH5	n/a				

## 4. Mechanical Information


### 4.1 AW-CU544-E-2X Mechanical Drawing

TOP View PCB Layout Footprint (Unit in mm Dia=0.75mm Solder Mask Defined)

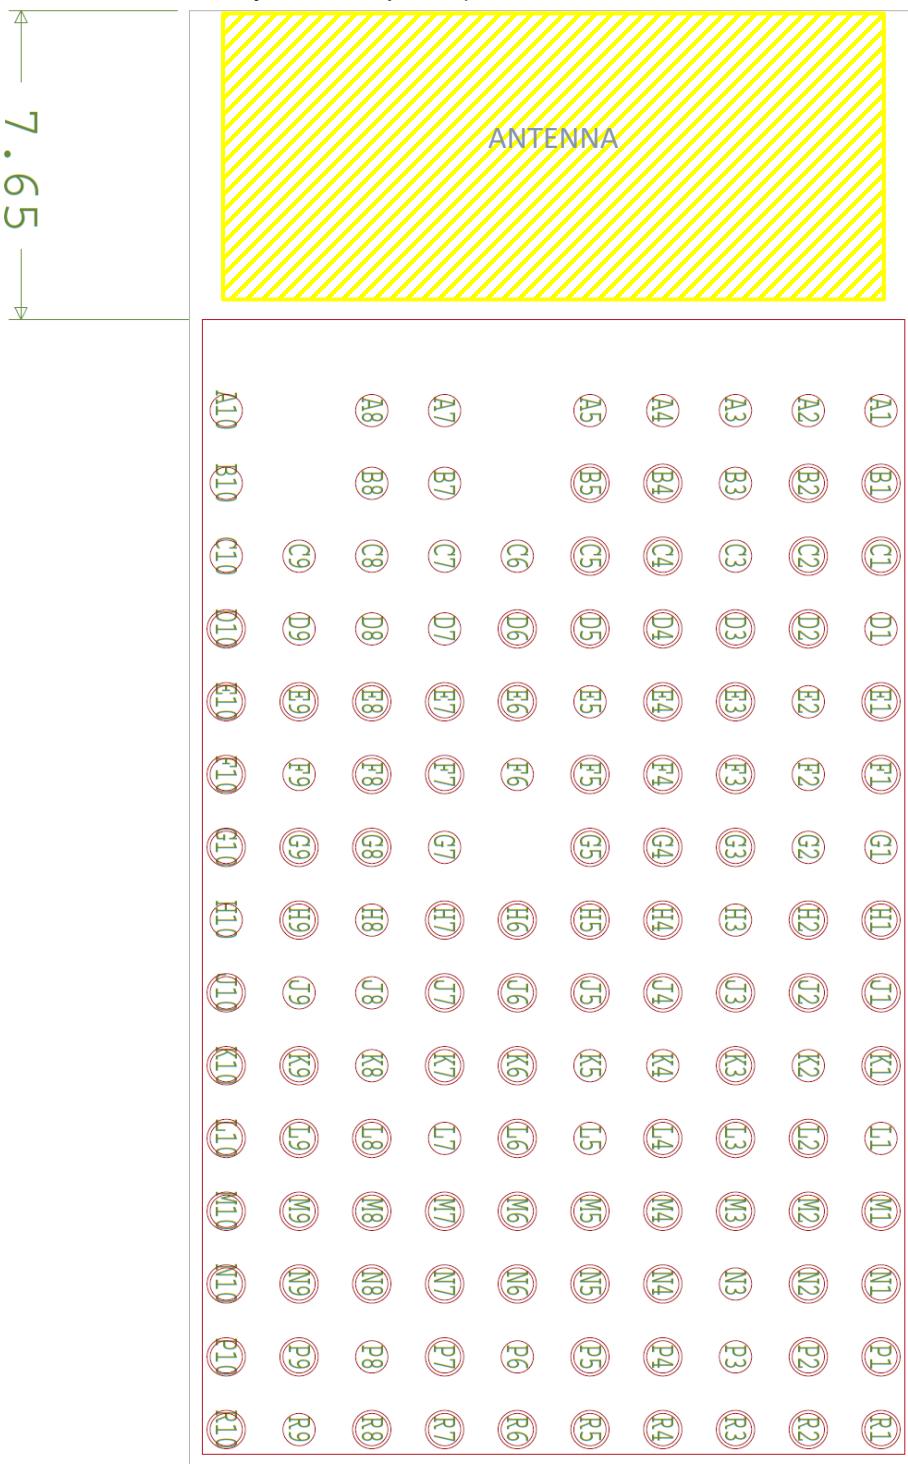


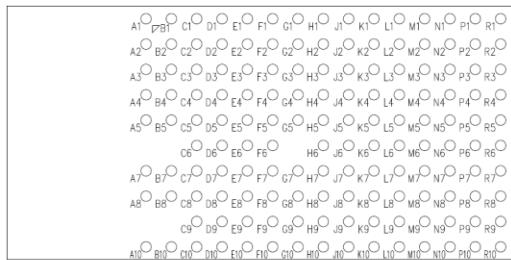

PIN DEFINED (TOP VIEW)

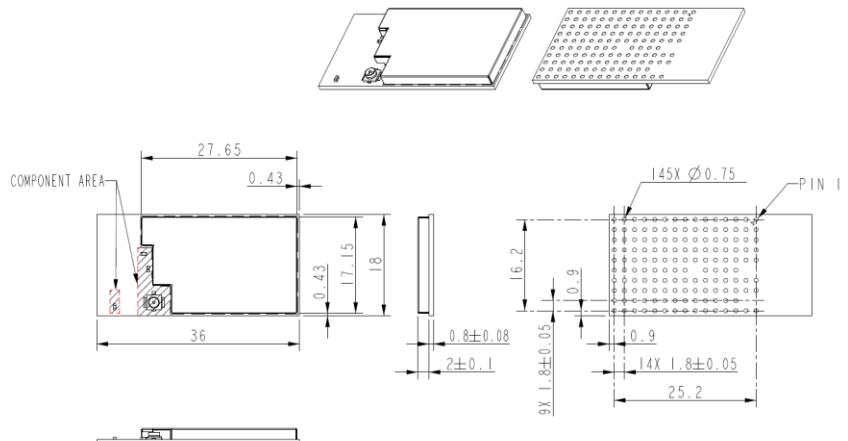


TOLERANCE UNLESS OTHERWISE SPECIFIED: ±0.15mm

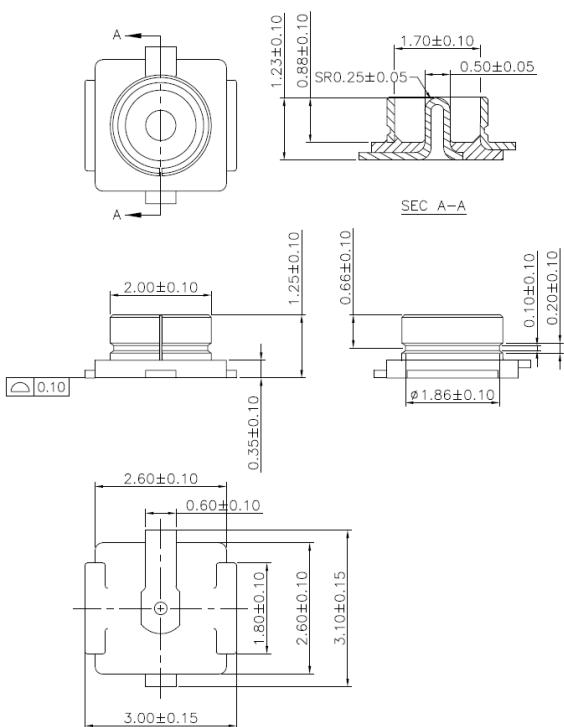


## 4.2 AW-CU544-P-2X Mechanical Drawing

TOP View PCB Layout Footprint (Unit in mm Dia=0.75mm Solder Mask Defined)

\*Keep out distance of the antenna is > 10mm for non-conductive materials & 20mm for conductive materials.  
 Do not extend main board PCB outline to the antenna area. Please refer to the layout guide.

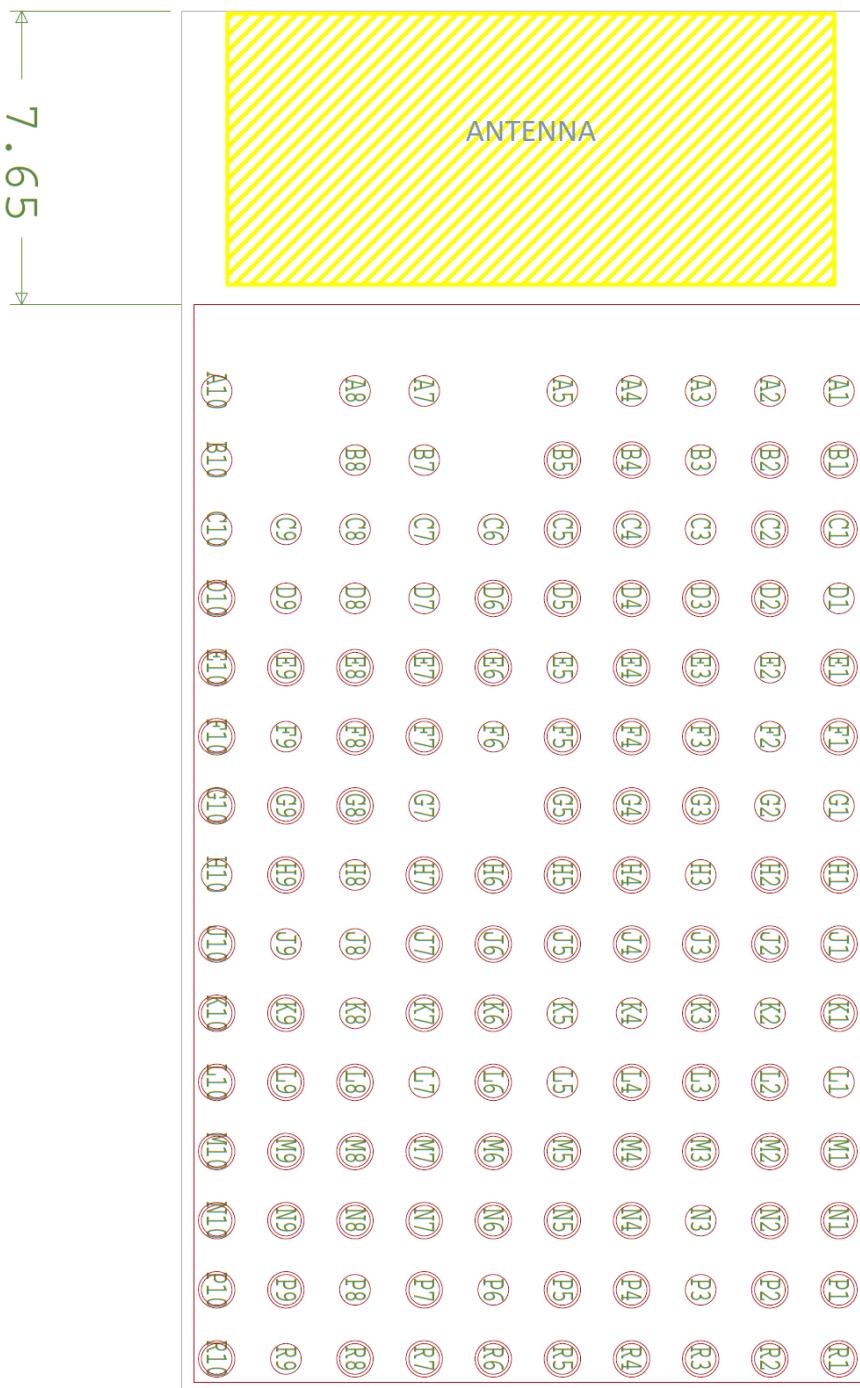

A1	P1	C1	D1	E1	F1	G1	H1	J1	K1	L1	M1	N1	P1	R1
A2	B2	C2	D2	E2	F2	G2	H2	J2	K2	L2	M2	N2	P2	R2
A3	B3	C3	D3	E3	F3	G3	H3	J3	K3	L3	M3	N3	P3	R3
A4	B4	C4	D4	E4	F4	G4	H4	J4	K4	L4	M4	N4	P4	R4
A5	B5	C5	D5	E5	F5	G5	H5	J5	K5	L5	M5	N5	P5	R5
	C6	D6	E6	F6	G6	H6	J6	K6	L6	M6	N6	P6	R6	
A7	B7	C7	D7	E7	F7	G7	H7	J7	K7	L7	M7	N7	P7	R7
A8	B8	C8	D8	E8	F8	G8	H8	J8	K8	L8	M8	N8	P8	R8
	C9	D9	E9	F9	G9	H9	J9	K9	L9	M9	N9	P9	R9	
A10	B10	C10	D10	E10	F10	G10	H10	J10	K10	L10	M10	N10	P10	R10

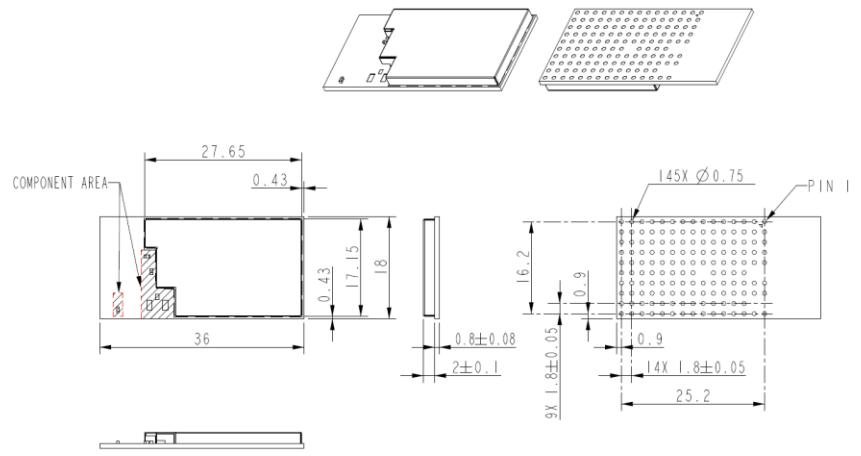

PIN DEFINED (TOP VIEW)

TOLERANCE UNLESS OTHERWISE SPECIFIED: ±0.15mm


## 5. Packaging Information

### 5.1

600pcs/reel, 1800 pcs/carton



### 5.2

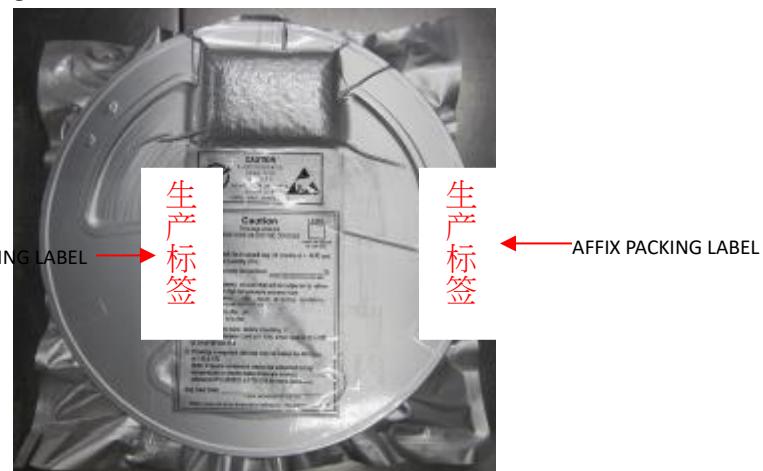

### 5.3



PINK BUBBLE WRAP

5.4



5.5

1 Carton= 3 Boxes



5.6

