

AW-CMA02

IEEE 802.11 a/b/g/n/ac Wireless LAN Bluetooth 5.2 Automotive Combo Module

Design Guide


Rev. A

Revision History

Version	Revision Date	Description	Initials	Approved
A	2022/7/25	● Initial Version	YuFu Chen	

Reference Schematic

The VBAT pin must have capacitor C1 (10uF), C2 (0.1uF) placed as close as possible to the pin 38, 39, 40.

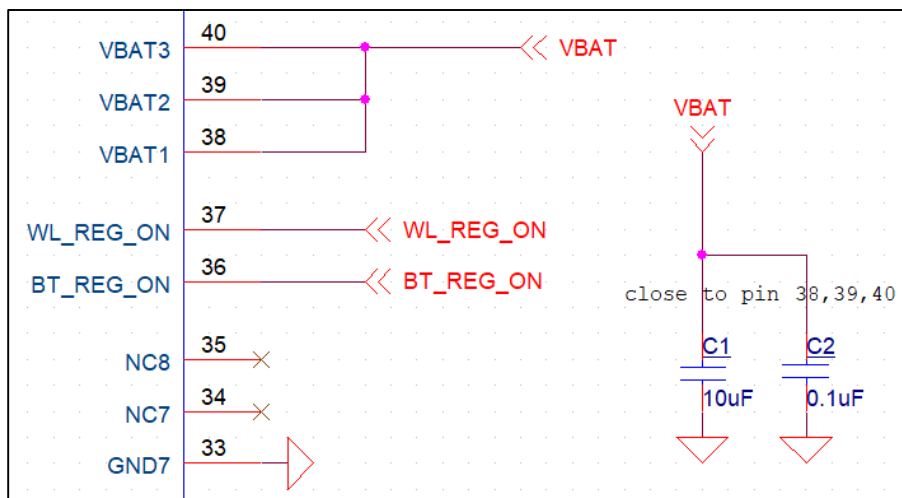

The VDDIO pin must have capacitor C3 (10UF), C4 (0.1uF) placed as close as possible to the pin 29, 30.

