

AW-XH327-SUR

**IEEE 802.11 a/b/g/n/ac/ax Wi-Fi
+ Bluetooth 6.0 Combo SIP Module**

Datasheet

Rev.B

DF

(For Standard)

Features

Wi-Fi

- 802.11a/b/g/n/ac/ax compliant, dual-band capable (2.4/5 GHz)
- 5GHz : 20/40/80-MHz channels, 1024-QAM, 2x2 MIMO providing up to 1.2 Gbps PHY data rate
- 2.4 GHz: 20 MHz channels, 1024-QAM, 2x2 MIMO providing up to 574 Mbps PHY data rate
- 802.11ax STA mode and Soft AP mode with 11ax scheduled access
- Supports 802.11d, h, k, r, v, w, ai
- Zero-wait dynamic frequency selection (DFS): Background channel availability check (CAC) scan for immediate switch to candidate DFS channel
- On-chip power amplifiers and low-noise amplifiers
- Supports 2 and 3-antenna configurations
- Supports multipoint external coexistence interface to optimize bandwidth utilization with other co-located wireless technologies such as LTE
- Fast VSDB (Virtual Simultaneous Dual Band)
- Worldwide regulatory support: Global products supported with worldwide homologated design
- Integrated Arm® Cortex® R4 processor with tightly coupled memory for complete WLAN subsystem functionality. This architecture offloads the host processor completely from

WLAN functionality.

- Transmission and reception of HE-SU and HE-ER-SU PPDU.
- Reception of HE-MU PPDU -OFDMA/MU-MIMO Frame.
- Transmission of HE-TB PPDU (Uplink MU OFDMA).

Bluetooth

- Bluetooth 6.0 (BDR + EDR + BLE).
- All Bluetooth 5.0/5.1/5.2 optional features supported including LE-Audio.
- Supports ISOAL HCI Enhancement (6.0) to enhance low latency and high reliable audio
- Dedicated Bluetooth RF path for best WLAN-BT coexistence performance.
- Bluetooth Class 1 or Class 2 transmitter operation.
- Supports extended synchronous connections (eSCO), for enhanced voice quality by allowing for retransmission of dropped packets.
- Adaptive frequency hopping (AFH) for reducing radio frequency interference.
- Interface support, host controller interface (HCI) using a high-speed UART interface and PCM for audio data.
- Supports multiple simultaneous Advanced Audio Distribution.
- Profiles (A2DP) for stereo sound.
- On-chip memory includes 512 KB SRAM and 2 MB ROM.



AzureWave Technologies, Inc.

Revision History

Document NO: R2-1327-DST-02

[illegible]

Table of Contents

Features	2
Revision History	3
Table of Contents	4
1. Introduction	5
1.1 Product Overview	5
1.2 Block Diagram	5
1.3 Specifications Table	6
1.3.1 General	6
1.3.2 WLAN	6
1.3.3 Bluetooth	9
1.3.4 Operating Conditions	9
2. Pin Definition	10
2.1 Pin Map	10
2.2 Pin Table	11
2.3 Host Configuration Interface Table	15
3. Electrical Characteristics	16
3.1 Absolute Maximum Ratings	16
3.2 Recommended Operating Conditions	16
3.3 Digital IO Pin DC Characteristics	16
3.4 Host Interface	17
3.4.1 SDIO Interface	17
3.4.2 UART Interface	19
3.5 Power up Timing Sequence	21
3.6 Power Consumption *	24
3.6.1 WLAN	24
3.6.2 Bluetooth	25
4. Mechanical Information	26
4.1 Mechanical Drawing	26
5. Packaging Information	27

1. Introduction


1.1 Product Overview

The AW-XH327-SUR device provides the highest level of integration for Commercial and Consumer IoT wireless systems with integrated dual-band 2x2 MIMO IEEE 802.11ax WLAN MAC/baseband/radio, Bluetooth 6.0 MAC/baseband/radio, and integrated Power Management Unit. WLAN and Bluetooth radios also include on-chip power amplifiers and low-noise amplifiers to further reduce the need for external components.

WLAN interfaces to host processor through a SDIO 3.0 interface while Bluetooth host interface is provided through high-speed 4-wire UART interface. Additionally, the Bluetooth section supports PCM interfaces for audio applications.

AW-XH327-SUR is qualified to operate across Industrial (-40 °C to +85 °C) temperature range.

1.2 Block Diagram

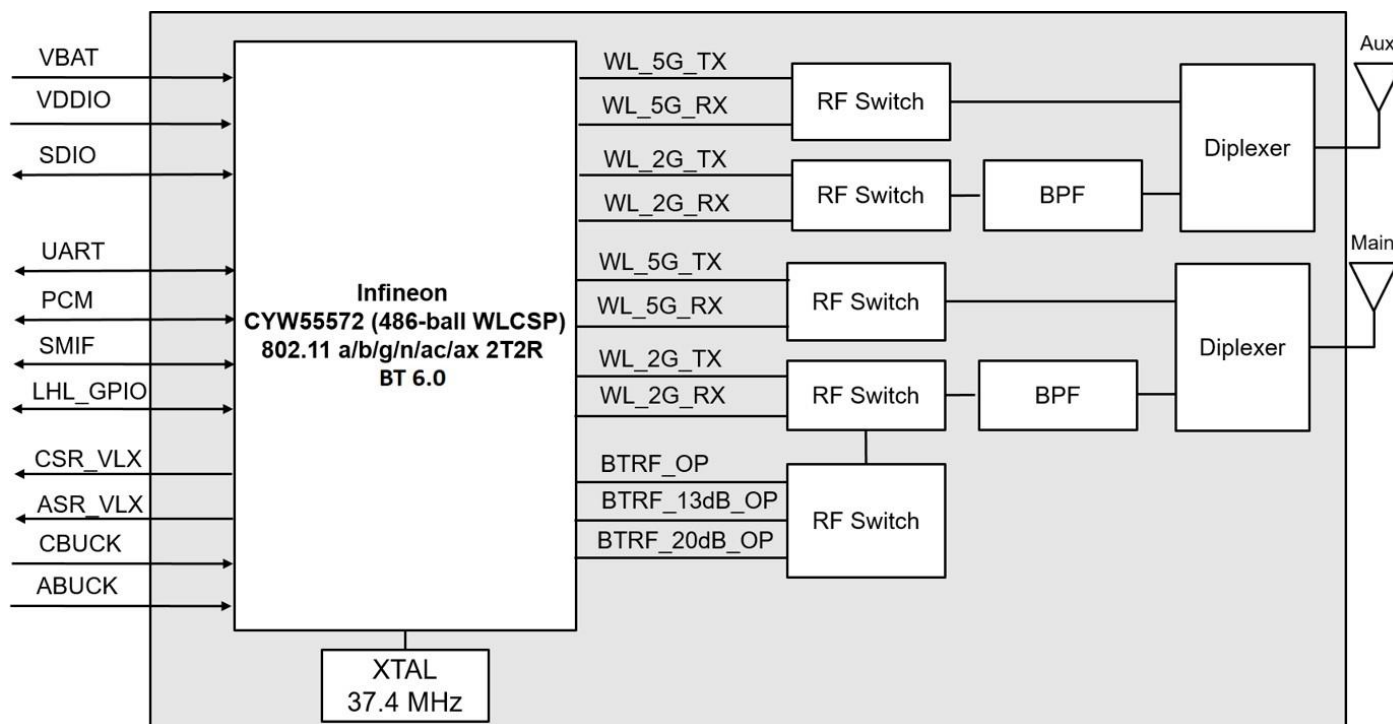

AW-XH327-SUR Block Diagram

1.3 Specifications Table

1.3.1 General

Features	Description
Product Description	IEEE 802.11 a/b/g/n/ac/ax Wi-Fi + Bluetooth 6.0 Combo SIP Module
Major Chipset	Infineon CYW55572 (486-ball WLCSP)
Host Interface	WiFi + BT ● SDIO + UART Note: Please refer to G10 pin of 2.3 Host configuration interface table for your interface choice
Dimension	10mm x 10mm x 1.26mm
Form factor	● Sip module, 117 pins
Antenna	2T2R, external ANT1(Main) : WiFi/Bluetooth → TX/RX ANT2(Aux) : WiFi → TX/RX
Weight	TBD

1.3.2 WLAN

Features	Description
WLAN Standard	IEEE 802.11 a/b/g/n/ac/ax 2T2R
WLAN VID/PID	N/A
WLAN SVID/SPID	N/A
Frequency Range	WLAN: 2.4 / 5 GHz Band
Modulation	DSSS DBPSK(1Mbps), DQPSK(2Mbps), CCK(11/5.5Mbps) OFDM BPSK(9/6Mbps/MCS0), QPSK(18/12Mbps/MCS1~2), 16-QAM(36/24Mbps/MCS3~4), 64-QAM(72.2/54/48Mbps/MCS5~7), 256-QAM(MCS8~9), 1024-QAM(MCS10~11)
Number of Channels	2.4GHz ● USA, Canada and Taiwan – 1 ~ 11 ● China, Most European Countries – 1 ~ 13 ● Japan, 1 ~ 13

	5GHz <ul style="list-style-type: none">USA, EUROPE – 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 149, 153, 157, 161, 165				
Output Power¹² (Board Level Limit)³	2.4G				
		Min	Typ	Max	Unit
	11b (11Mbps) @EVM<8%	17	19	21	dBm
	11g (54Mbps) @EVM≤-25 dB	15.5	17.5	19.5	dBm
	11n (HT20 MCS7) @EVM≤-27 dB	13.5	15.5	17.5	dBm
	11ax (HE20 MCS11) @EVM≤-35 dB	12.5	14.5	16.5	dBm
	5G				
		Min	Typ	Max	Unit
	11a (54Mbps) @EVM<-25 dB	14.5	16.5	18.5	dBm
	11n (HT20 MCS7) @EVM≤-27 dB	13.5	15.5	17.5	dBm
	11n (HT40 MCS7) @EVM≤-27 dB	13.5	15.5	17.5	dBm
	11ac (VHT20 MCS8) @EVM≤-30 dB	12	14	16	dBm
	11ac (VHT40 MCS9) @EVM≤-32 dB	10.5	12.5	14.5	dBm
	11ac (VHT80 MCS9) @EVM≤-32 dB	9.5	11.5	13.5	dBm
	11ax (HE20 MCS11) @EVM≤-35 dB	11	13	15	dBm
11ax (HE40 MCS11) @EVM≤-35 dB	11	13	15	dBm	
11ax (HE80 MCS11) @EVM≤-35 dB	10	12	14	dBm	

**Output Power¹²
(Board Level Limit)³**

¹ Unless otherwise stated, limit values apply for an ambient temperature of +25 °C.

² Tx power variation ±3.0 dB for process, voltage and temperature variation across -40°C to +85°C.

³ If you have any certification questions about output power please contact FAE directly

Receiver Sensitivity⁴	2.4G				
		Min	Typ	Max	Unit
	11b (11Mbps)		-89	-85	dBm
	11g (54Mbps)		-77	-74	dBm
	11n (HT20 MCS7)		-75	-72	dBm
	11ax (HE20 MCS11)		-64	-61	dBm
	5G				
		Min	Typ	Max	Unit
	11a (54Mbps)		-74	-71	dBm
	11n (HT20 MCS7)		-72	-69	dBm
	11n (HT40 MCS7)		-69	-66	dBm
	11ac (VHT20 MCS8)		-67	-64	dBm
	11ac (VHT40 MCS9)		-63	-60	dBm
	11ac (VHT80 MCS9)		-60	-57	dBm
	11ax (HE20 MCS11)		-61	-58	dBm
	11ax (HE40 MCS11)		-56	-53	dBm
	11ax (HE80 MCS11)		-55	-52	dBm
Data Rate	802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0~7 HT20/HT40 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11ac: MCS0~8 VHT20 802.11ac: MCS0~9 VHT40/VHT80 802.11ax: MCS10~11 HE20/HE40/HE80				
Security	<ul style="list-style-type: none"> ● WPA, WAPI STA, WPA2 (Enterprise) and WPA3 (Enterprise) support for powerful encryption and authentication ● AES and TKIP in hardware for faster data encryption and IEEE 802.11i compatibility ● Reference WLAN subsystem provides Wi-Fi Protected Setup (WPS) 				

⁴ Sensitivity with one RX core active.

1.3.3 Bluetooth

Features	Description				
Bluetooth Standard	Bluetooth 6.0				
Bluetooth VID/PID	N/A				
Frequency Range	2400~2483.5MHz				
Modulation	GFSK (1Mbps), $\pi/4$ DQPSK (2Mbps) and 8DPSK (3Mbps)				
Output Power⁵		Min	Typ	Max	Unit
	BDR	4	7	10	dBm
	Low Energy (2MHz)	4	7	10	dBm
Receiver Sensitivity**		Min	Typ	Max	Unit
	BDR		-90	-87	dBm
	EDR		-86	-83	dBm
	Low Energy (2MHz)		-92	-89	dBm


1.3.4 Operating Conditions

Features	Description
Operating Conditions	
Voltage	3.3V
Operating Temperature	-40°C to 85°C
Operating Humidity	less than 85% R.H.
Storage Temperature	-40°C to 85°C
Storage Humidity	less than 60% R.H.
ESD Protection	
Human Body Model	±1000 V
Changed Device Model	±250 V

⁵ If you have any certification questions about output power please contact FAE directly

2. Pin Definition

2.1 Pin Map

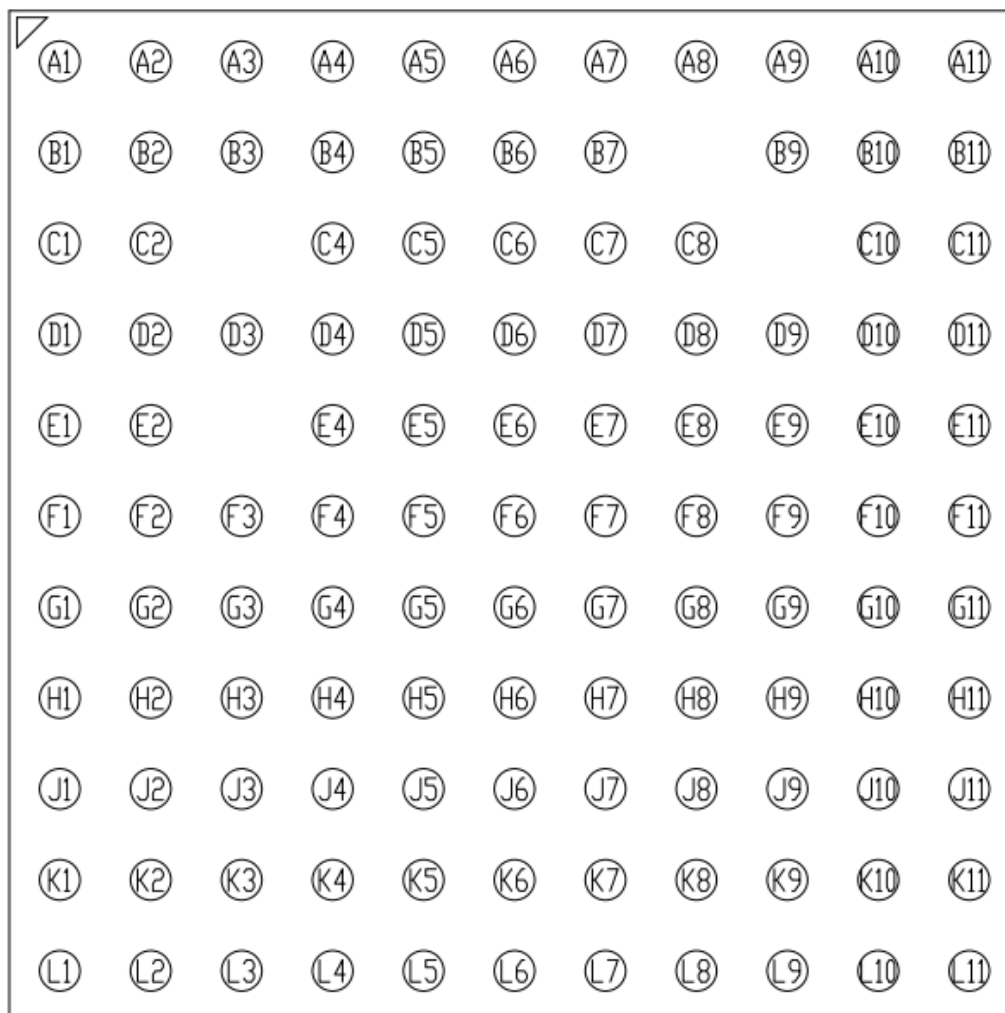

AW-XH327-SUR Pin Map (Top View)

2.2 Pin Table

Pin No	Definition	Basic Description	Voltage	Type
A1	GND	Ground.	-	GND
A2	RESERVED	Please don't connect to this pin.	-	-
A3	RESERVED	Please don't connect to this pin.	-	-
A4	RESERVED	Please don't connect to this pin.	-	-
A5	RESERVED	Please don't connect to this pin.	-	-
A6	RESERVED	Please don't connect to this pin.	-	-
A7	RESERVED	Please don't connect to this pin.	-	-
A8	GND	Ground.	-	GND
A9	CSR_VLX	CSR Power Stage Output to Inductor	0.9V	O
A10	ASR_VLX	ASR Power Stage Output to Inductor	1.12V	O
A11	GND	Ground.	-	GND
B1	GND	Ground.	-	GND
B2	GND	Ground.	-	GND
B3	GND	Ground.	-	GND
B4	GND	Ground.	-	GND
B5	GND	Ground.	-	GND
B6	GND	Ground.	-	GND
B7	GND	Ground.	-	GND
B9	CSR_VLX	CSR Power Stage Output to Inductor	0.9V	O
B10	ASR_VLX	ASR Power Stage Output to Inductor	1.12V	O
B11	GND	Ground.	-	GND
C1	WL_REG_ON	Low asserting reset for WiFi core	VDDIO ⁶	I
C2	BT_PCM_SYNC	PCM sync	VDDIO	I/O

⁶ For WL_REG_ON pins voltage. Please refer to 3.3 Digital IO Pin DC Characteristics

C4	RESERVED	Please don't connect to this pin.	-	N/A
C5	GND	Ground.	-	GND
C6	LHL_GPIO5	Miscellaneous General Purpose I/O	VDDIO	I/O
C7	BT_REG_ON	Low asserting reset for Bluetooth core	VDDIO ⁷	I
C8	GND	Ground.	-	GND
C10	VBAT	Main power voltage source input	3.3V	PWR
C11	VBAT	Main power voltage source input	3.3V	PWR
D1	RESERVED	Please don't connect to this pin.	-	N/A
D2	BT_PCM_IN	PCM data input.	VDDIO	I
D3	BT_PCM_OUT	PCM data output.	VDDIO	O
D4	BT_PCM_CLK	PCM clock; can be master (output) or slave (input).	VDDIO	I/O
D5	RESERVED	Please don't connect to this pin.	-	N/A
D6	LHL_GPIO3	Miscellaneous General Purpose I/O	VDDIO	I/O
D7	LHL_GPIO2	Miscellaneous General Purpose I/O	VDDIO	I/O
D8	GND	Ground.	-	GND
D9	CBUCK_0P9	Internal Buck 0.9V voltage generation pin.	0.9V	I
D10	CBUCK_0P9	Internal Buck 0.9V voltage generation pin.	0.9V	I
D11	ABUCK_1P12	Internal Buck 1.12V voltage generation pin.	1.12V	I
E1	GND	Ground.	-	GND
E2	GPIO_0_WL_HOST_WAKE	WL Host Wake.	VDDIO	O
E4	BT_DEV_WAKE	Bluetooth DEVICE WAKE	VDDIO	I/O
E5	GND	Ground.	-	GND
E6	LHL_GPIO4	Miscellaneous General Purpose I/O	VDDIO	I/O
E7	GPIO_11_WL_UART_TX	Debug UART Serial Output.	VDDIO	O

⁷ For BT_REG_ON pins voltage. Please refer to 3.3 Digital IO Pin DC Characteristics

E8	GND	Ground.	-	GND
E9	GPIO_10_WL_UART_RX	Debug UART Serial Input.	VDDIO	I
E10	GND	Ground.	-	GND
E11	ABUCK_1P12	Internal Buck 1.12V voltage generation pin.	1.12V	I
F1	BT_UART_RTS_N	UART request-to-send. Active-low request-to-send signal for the HCI UART interface. BT LED control pin.	VDDIO	O
F2	BT_UART_CTS_N	UART clear-to-send. Active-low clear-to-send signal for the HCI UART interface.	VDDIO	I
F3	BT_HOST_WAKE	Bluetooth HOST_WAKE.	VDDIO	I/O
F4	BT_CLK_REQ	A Bluetooth clock request.	VDDIO	I/O
F5	GND	Ground.	-	GND
F6	LHL_GPIO0	Miscellaneous General Purpose I/O	VDDIO	I/O
F7	LPO_IN	External Sleep Clock Input (32.768 kHz)	VDDIO	I
F8	GND	Ground.	-	GND
F9	GND	Ground.	-	GND
F10	GND	Ground.	-	GND
F11	VDDIO	1.8 V IO Supply for WLAN GPIOs	1.8V	PWR
G1	BT_UART_TXD	UART Serial Output. Serial data output for the HCI UART interface.	VDDIO	O
G2	BT_UART_RXD	UART serial input. Serial data input for the HCI UART interface.	VDDIO	I
G3	GND	Ground.	-	GND
G4	GND	Ground.	-	GND
G5	GND	Ground.	-	GND
G6	GND	Ground.	-	GND
G7	GND	Ground.	-	GND
G8	GND	Ground.	-	GND
G9	GND	Ground.	-	GND

G10	GPIO_1	Strap option	VDDIO	I/O
G11	GND	Ground.	-	GND
H1	SDIO_CMD	SDIO Command Line	VDDIO	I/O
H2	SDIO_DATA_0	SDIO Data Line 0	VDDIO	I/O
H3	SDIO_DATA_3	SDIO Data Line 3	VDDIO	I/O
H4	SDIO_DATA_2	SDIO Data Line 2	VDDIO	I/O
H5	GND	Ground.	-	GND
H6	WL_DEV_WAKE	WL DEV_WAKE.	VDDIO	I/O
H7	GND	Ground.	-	GND
H8	GND	Ground.	-	GND
H9	RESERVED	Please don't connect to this pin.	-	-
H10	RESERVED	Please don't connect to this pin.	-	-
H11	RESERVED	Please don't connect to this pin.	-	-
J1	SDIO_CLK	SDIO Clock Input	VDDIO	I
J2	SDIO_DATA_1	SDIO Data Line 1	VDDIO	I/O
J3	GND	Ground.	-	GND
J4	GND	Ground.	-	GND
J5	GND	Ground.	-	GND
J6	GND	Ground.	-	GND
J7	GND	Ground.	-	GND
J8	GND	Ground.	-	GND
J9	RESERVED	Please don't connect to this pin.	-	-
J10	RESERVED	Please don't connect to this pin.	-	-
J11	RESERVED	Please don't connect to this pin.	-	-
K1	GND	Ground.	-	GND
K2	GND	Ground.	-	GND

K3	GND	Ground.	-	GND
K4	GND	Ground.	-	GND
K5	GND	Ground.	-	GND
K6	BT_GPIO_11	BT General Purpose I/O	VDDIO	I/O
K7	GND	Ground.	-	GND
K8	GND	Ground.	-	GND
K9	GND	Ground.	-	GND
K10	GND	Ground.	-	GND
K11	GND	Ground.	-	GND
L1	GND	Ground.	-	GND
L2	RESERVED	Please don't connect to this pin.	-	N/A
L3	GND	Ground.	-	GND
L4	GND	Ground.	-	GND
L5	C0_ANT	WLAN/BT Main RF TX/RX path.	-	RF
L6	GND	Ground.	-	GND
L7	GND	Ground.	-	GND
L8	GND	Ground.	-	GND
L9	GND	Ground.	-	GND
L10	C1_ANT	WLAN Aux RF TX/RX path.	-	RF
L11	GND	Ground.	-	GND

2.3 Host Configuration Interface Table

Pin No	Definition	Interface	Strap
G10	GPIO_1	SDIO	0

3. Electrical Characteristics

3.1 Absolute Maximum Ratings

Symbol	Parameter	Minimum	Typical	Maximum	Unit
VBAT	DC supply for the VBAT and PA driver supply	-0.5	-	6.0	V
VDDIO	DC supply voltage for digital I/O	-0.5	-	2.2	V
Tj	Maximum junction temperature	-	-	125	°C

3.2 Recommended Operating Conditions

Symbol	Parameter	Minimum	Typical	Maximum	Unit
VBAT	Power supply for Internal Regulator and FEM	3.13	3.3	3.47	V
VDDIO	DC supply voltage for digital I/O	1.71	1.8	1.89	V


3.3 Digital IO Pin DC Characteristics

Symbol	Parameter	Minimum	Typical	Maximum	Unit
For VDDIO, VDDIO_SD, BT_VDDO = 1.8 V:					
V_{IH}	Input high voltage	0.65 × VDDIO	-	-	V
V_{IL}	Input low voltage	-	-	0.35 × VDDIO	V
V_{OH}	Output high voltage	VDDIO – 0.4	-	-	V
V_{OL}	Output Low Voltage	-	-	0.45	V
For WL_REG_ON & BT_REG_ON pins					
-	Input High Voltage	1.2	-	VBAT	V
-	Input Low Voltage	-	-	0.3	V

3.4 Host Interface

3.4.1 SDIO Interface

SDIO Bus Timing (Default Mode)

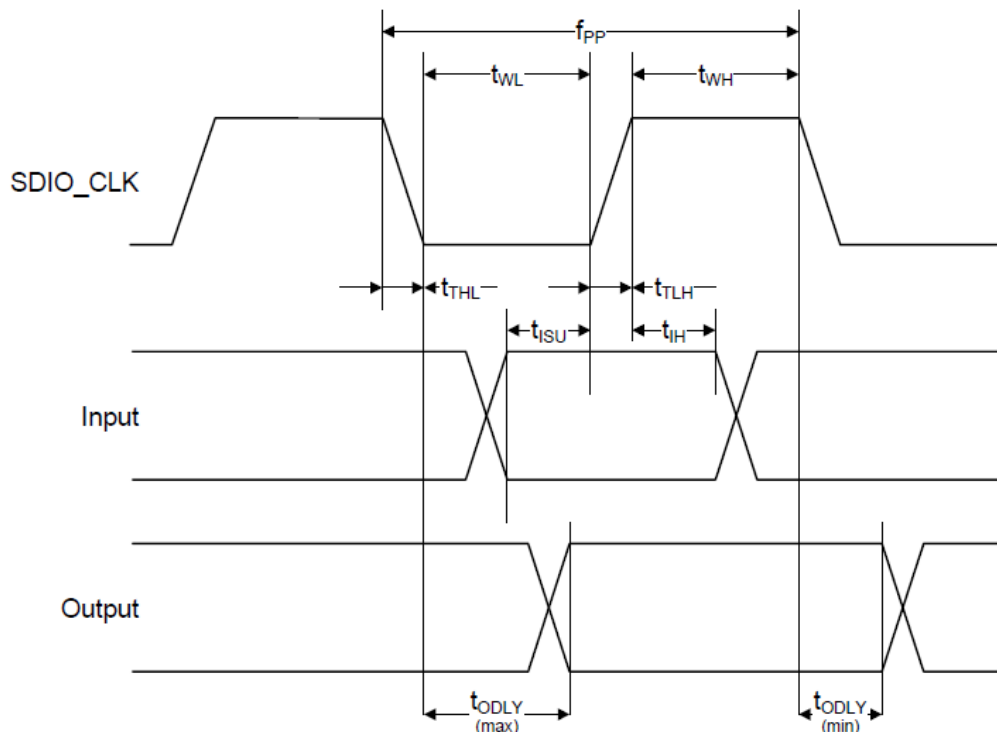


SDIO Bus Timing Parameters (Default Mode)

Parameter	Symbol	Minimum	Typical	Maximum	Unit
SDIO CLK (All values are referred to minimum VIH and maximum VIL)					
Frequency – Data Transfer mode	f_{PP}	0	–	25	MHz
Frequency – Identification mode	f_{OD}	0	–	400	kHz
Clock low time	t_{WL}	10	–	–	ns
Clock high time	t_{WH}	10	–	–	ns
Clock rise time	t_{TLH}	–	–	10	ns
Clock low time	t_{THL}	–	–	10	ns
Inputs: CMD, DAT (referenced to CLK)					
Input setup time	t_{ISU}	5	–	–	ns
Input hold time	t_{IH}	5	–	–	ns

Outputs: CMD, DAT (referenced to CLK)					
Output delay time – Data Transfer mode	t_{ODLY}	0	–	14	ns
Output delay time – Identification mode	t_{ODLY}	0	–	50	ns

SDIO Bus Timing (High-Speed Mode)

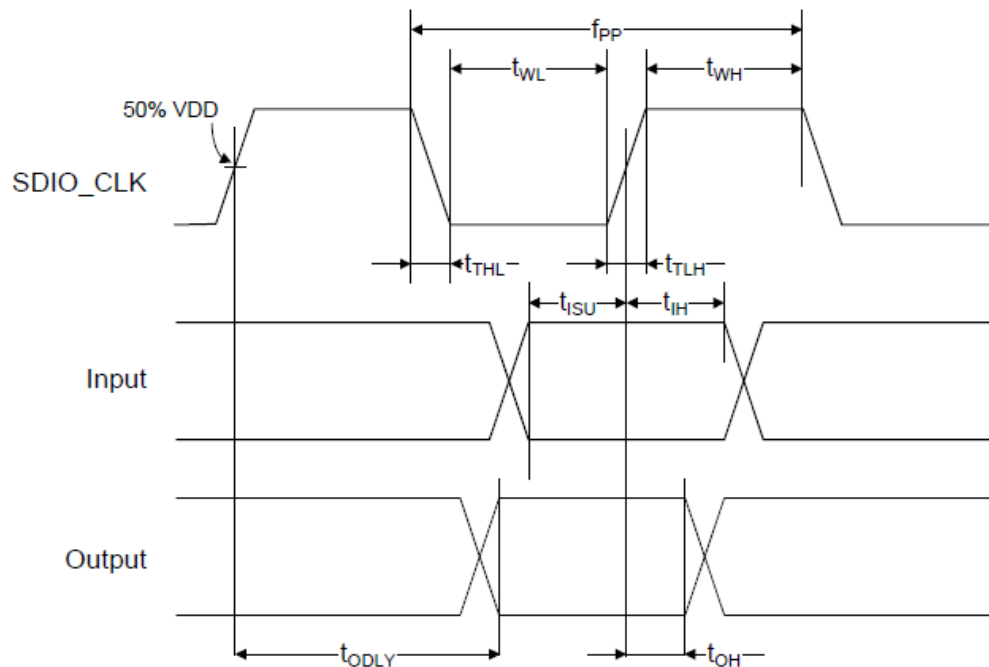

SDIO Bus Timing Parameters (High-Speed Mode)

Parameter	Symbol	Minimum	Typical	Maximum	Unit
SDIO CLK (all values are referred to minimum V_{IH} and maximum V_{IL}^b)					
Frequency – Data Transfer Mode	f_{PP}	0	–	50	MHz
Frequency – Identification Mode	f_{OD}	0	–	400	kHz
Clock low time	t_{WL}	7	–	–	ns
Clock high time	t_{WH}	7	–	–	ns
Clock rise time	t_{TLH}	–	–	3	ns
Clock low time	t_{THL}	–	–	3	ns
Inputs: CMD, DAT (referenced to CLK)					
Input setup Time	t_{ISU}	6	–	–	ns

Input hold Time	t_{IH}	2	–	–	ns
Outputs: CMD, DAT (referenced to CLK)					
Output delay time – Data Transfer Mode	t_{ODLY}	–	–	14	ns
Output hold time	t_{OH}	2.5	–	–	ns
Total system capacitance (each line)	CL	–	–	40	pF

3.4.2 UART Interface

The AW-XH327-SUR UART is a standard 4-wire interface (RX, TX, RTS, and CTS) with adjustable baud rates from 9600 bps to 4.0 Mbps. The baud rate may be selected through a vendor-specific UART HCI command.


UART has a 1040-byte receive FIFO and a 1040-byte transmit FIFO to support EDR. Access to the FIFOs is conducted through the AHB interface through either DMA/CPU. The UART supports the Bluetooth 6.0 UART HCI specification. The default baud rate is 115.2 Kbaud.

The AW-XH327-SUR UART can perform XON/XOFF flow control and includes hardware support for the Serial Line Input Protocol (SLIP). It can also perform wake-on activity. For example, activity on the RX or CTS inputs can wake the chip from a sleep state.

Normally, the UART baud rate is set by a configuration record downloaded after device reset and the host does not need to adjust the baud rate. Support for changing the baud rate during normal HCI UART operation is included through a vendor-specific command that allows the host to adjust the contents of the baud rate registers. The AW-XH327-SUR UARTs operate correctly with the host UART as long as the combined baud rate error of the two devices is within $\pm 2\%$.

UART Interface Signals

PIN No.	Name	Description	Type
F1	BT_UART_RTS_N	UART request-to-send. Active-low request-to-send signal for the HCI UART interface. BT LED control pin.	O
F2	BT_UART_CTS_N	UART clear-to-send. Active-low clear-to-send signal for the HCI UART interface.	I
G1	BT_UART_TXD	UART Serial Output. Serial data output for the HCI UART interface.	O
G2	BT_UART_RXD	UART serial input. Serial data input for the HCI UART interface.	I

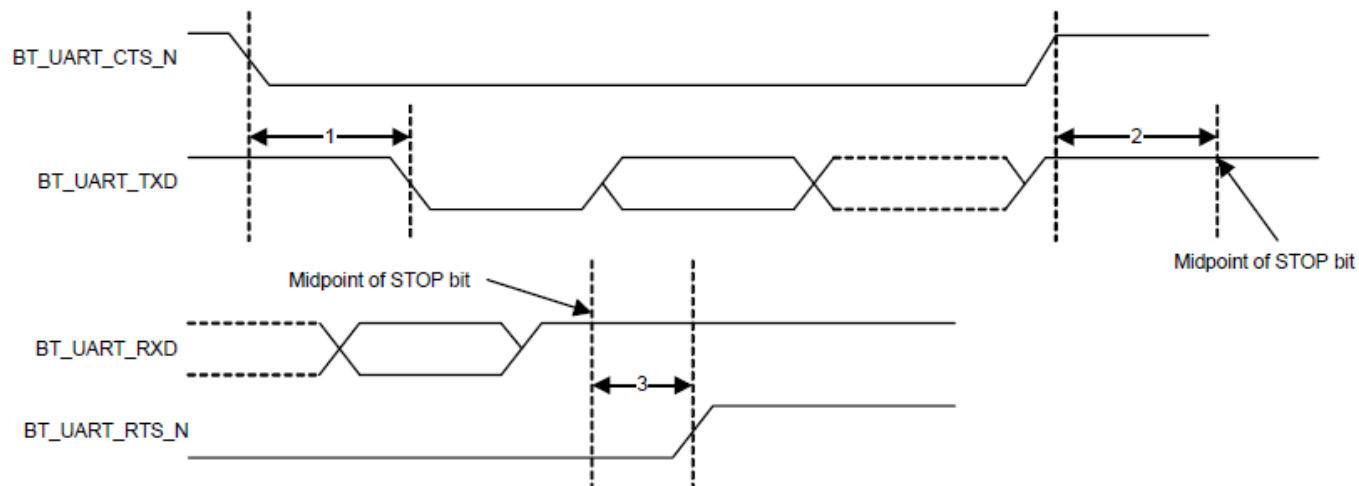

UART Timing

	Reference Characteristics	Minimum	Typical	Maximum	Unit
1	Delay time, BT_UART_CTS_N low to BT_UART_TXD valid	—	—	1.5	Bit periods
2	Setup time, BT_UART_CTS_N high before midpoint of stop bit	—	—	0.5	Bit periods
3	Delay time, midpoint of stop bit to BT_UART_RTS_N high	—	—	0.5	Bit periods

3.5 Power up Timing Sequence

AW-XH327-SUR has two signals that allow the host to control power consumption by enabling or disabling the Bluetooth, WLAN, and internal regulator blocks. These signals are described below. Additionally, diagrams are provided to indicate proper sequencing of the signals for various operational states. The timing values indicated are minimum required values; longer delays are also acceptable.

Description of Control Signals


■ **WL_REG_ON**: Used by the PMU to power up the WLAN section. It is also OR-gated with the BT_REG_ON input to control the internal AW-XH327-SUR regulators. When this pin is high, the regulators are enabled and the WLAN section is out of reset. When this pin is low the WLAN section is in reset. If both the BT_REG_ON and WL_REG_ON pins are low, the regulators are disabled.

■ **BT_REG_ON**: Used by the PMU (OR-gated with WL_REG_ON) to power up the internal AW-XH327-SUR regulators. If both the BT_REG_ON and WL_REG_ON pins are low, the regulators are disabled. When this pin is low and WL_REG_ON is high, the BT section is in reset.

Note

■ VBAT and VDDIO should not rise 10%–90% faster than 40 microseconds.


WLAN = ON, Bluetooth = ON

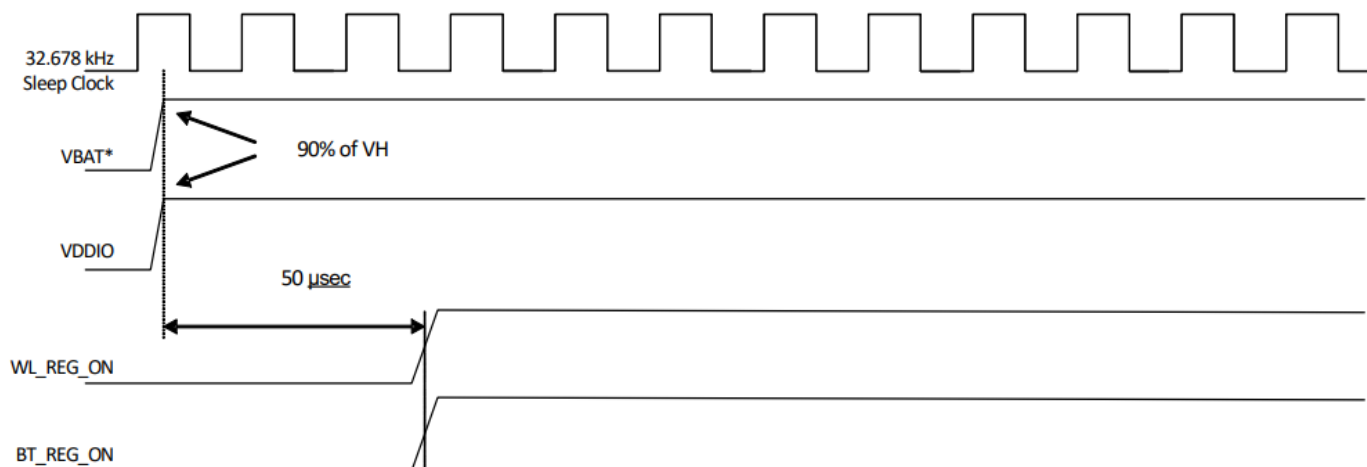

***Notes:**

1. VBAT and VDDIO should not rise 10%–90% faster than 40 microseconds.
2. VBAT should be up before or at the same time as VDDIO. VDDIO should NOT be present first or be held high before VBAT is high.


WLAN = OFF, Bluetooth = OFF

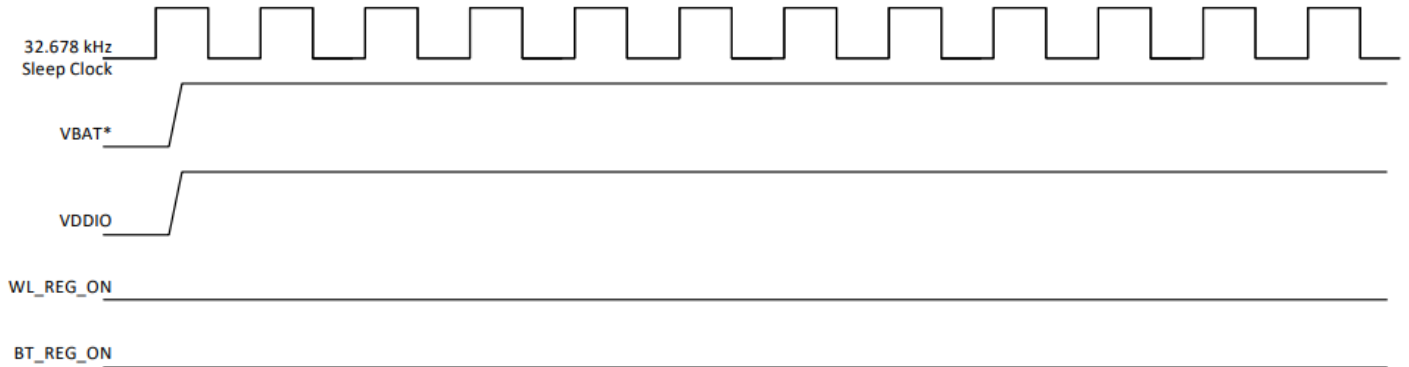

***Notes:**

1. VBAT and VDDIO should not rise 10%–90% faster than 40 microseconds.
2. VBAT should be up before or at the same time as VDDIO. VDDIO should NOT be present first or be held high before VBAT is high.


WLAN = ON, Bluetooth = OFF

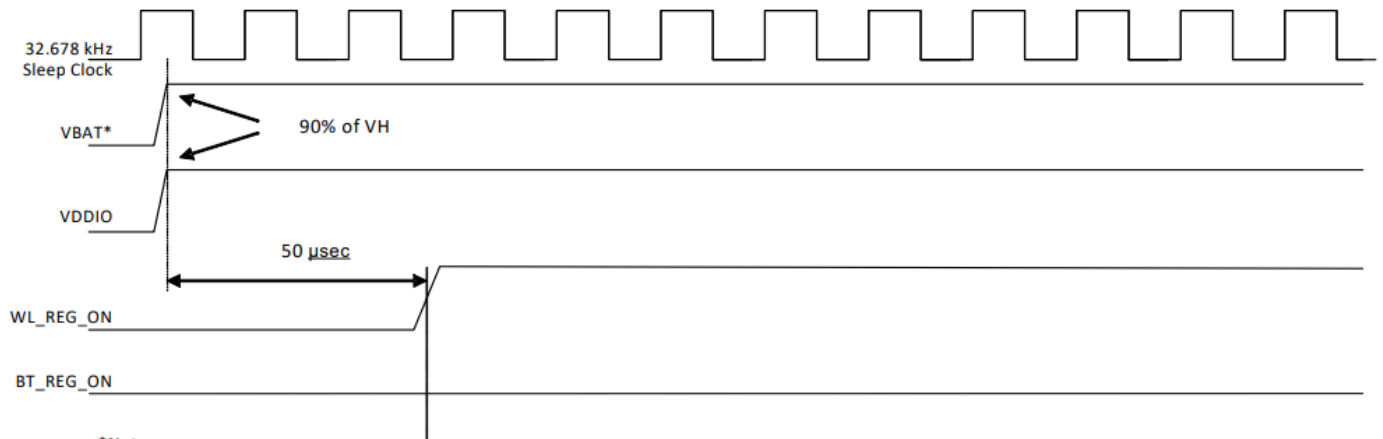


***Notes:**

1. VBAT and VDDIO should not rise 10%–90% faster than 40 microseconds.
2. VBAT should be up before or at the same time as VDDIO. VDDIO should NOT be present first or be held high before VBAT is high.

WLAN = OFF, Bluetooth = ON

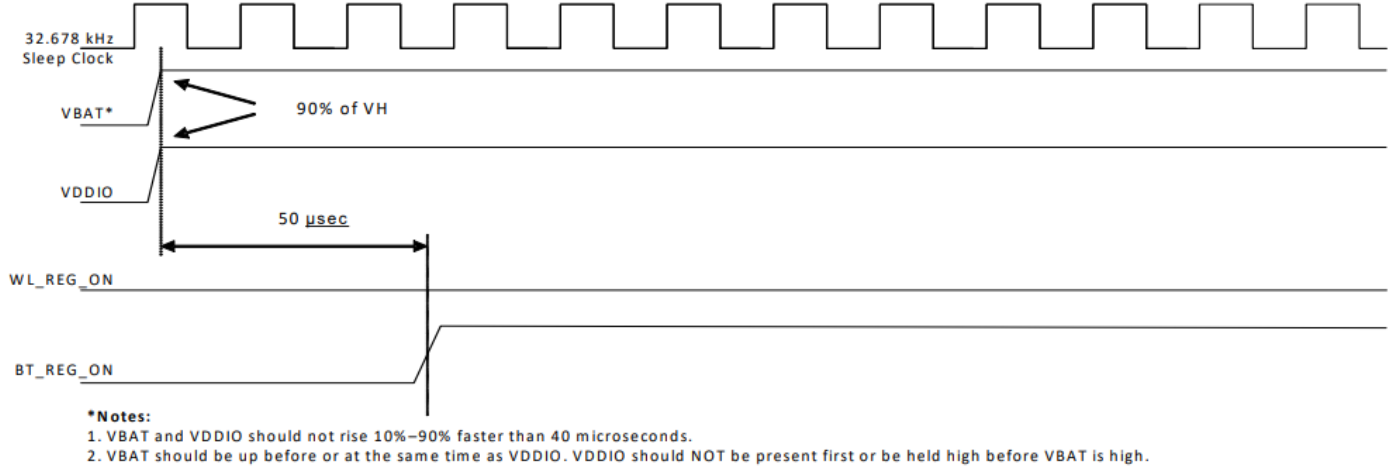

WLAN Boot-Up Sequence for SDIO Host

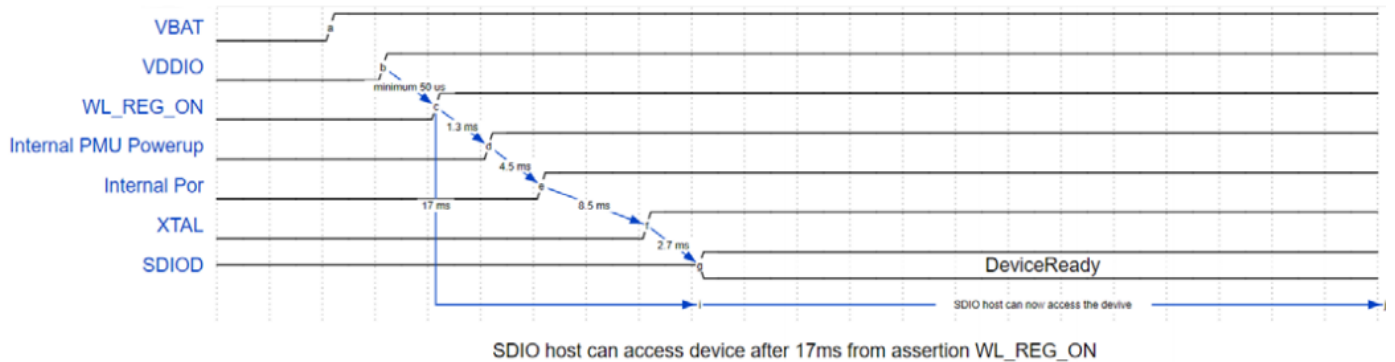

3.6 Power Consumption*

3.6.1 WLAN

No.	Item			P8_PIN1 VBAT_3.3V (mA)	
				Max.	Avg.
1	OFF ^{*(1)(2)(5)}			0.01	0.0002
2	Deepsleep ^{*(2)(3)(5)(6)}			0.7	0.3
3	Power Save 2.4GHz (DTIM-1) ^{*(2)(4)(6)}			73	1.3
4	Power Save 5GHz (DTIM-1) ^{*(2)(4)(6)}			84	1.7
Band (GHz)	Mode	BW (MHz)	RF Power (dBm)	Transmit ^{*(6)}	
				Max.	Avg.
2.4	11b@1Mbps	20	19.5	279	273
	11g@54Mbps	20	18	293	268
	11n@MCS8 MIMO	20	16	483	437
	11n@MCS15 MIMO	20	16	458	416
	11ax@MCS0 NSS2	20	15	449	399
	11ax@MCS11 NSS2	20	15	463	426
5	11a@6Mbps	20	16.5	353	323
	11n@MCS8 MIMO	20	15.5	654	584
	11n@MCS15 MIMO	40	15.5	644	615
	11ac@MCS0 NSS2	80	11.5	567	504
	11ac@MCS9 NSS2	80	11.5	558	532
	11ax@MCS0 NSS2	80	12	573	512
	11ax@MCS11 NSS2	80	12	570	540
Band (GHz)	Mode	BW(MHz)		Receive ^{*(6)}	
				Max.	Avg.
2.4	11b@11Mbps	20		42	42
	11n@MCS7	20		42	41
	11ax@MCS11 NSS1	20		42	41
5	11a@54Mbps	20		46	45
	11n@MCS7	40		60	60
	11ac@MCS9 NSS1	80		61	60
	11ax@MCS11 NSS1	80		60	60

No.	Item			J2_PIN1 VDDIO_1.8V (mA)	
				Max.	Avg.
1	Deepsleep ^{*(2)(3)(5)(6)}			0.2	0.2
2	Power Save 2.4GHz (DTIM-1) ^{*(2)(4)(6)}			1.6	0.3
3	Power Save 5GHz (DTIM-1) ^{*(2)(4)(6)}			1.6	0.3
Band (GHz)	Mode	BW (MHz)	RF Power (dBm)	Transmit ^{*(6)}	
				Max.	Avg.
2.4	11b@1Mbps	20	19.5	5.8	5.6
	11ax@MCS11 NSS1	20	15	6.0	5.6
5	11a@6Mbps	20	16.5	5.8	5.6
	11ax@MCS11 NSS1	80	12	6.0	5.6
Band (GHz)	Mode	BW(MHz)		Receive ^{*(6)}	
				Max.	Avg.
2.4	11b@11Mbps	20		1.7	1.7
5	11ax@MCS11 NSS1	80		1.7	1.7


3.6.2 Bluetooth

No.	Mode	Packet Type	RF Power (dBm)	JP8_PIN1 VBAT_3.3V (mA)	
				Max.	Avg.
1	Sleep ^{*(1)}	N/A		0.1	0.04
2	Transmit ^{*(2)}	DH5/3DH5	7	17	16
3	Receive ^{*(2)}	DH5/3DH5	N/A	10	10

No.	Mode	Packet Type	RF Power (dBm)	J2_PIN1 VDDIO_1.8V (uA)	
				Max.	Avg.
1	Sleep ^{*(1)}	N/A		102	68
2	Transmit ^{*(2)}	DH5/3DH5	7	394	364
3	Receive ^{*(2)}	DH5/3DH5	N/A	366	363


4. Mechanical Information

4.1 Mechanical Drawing

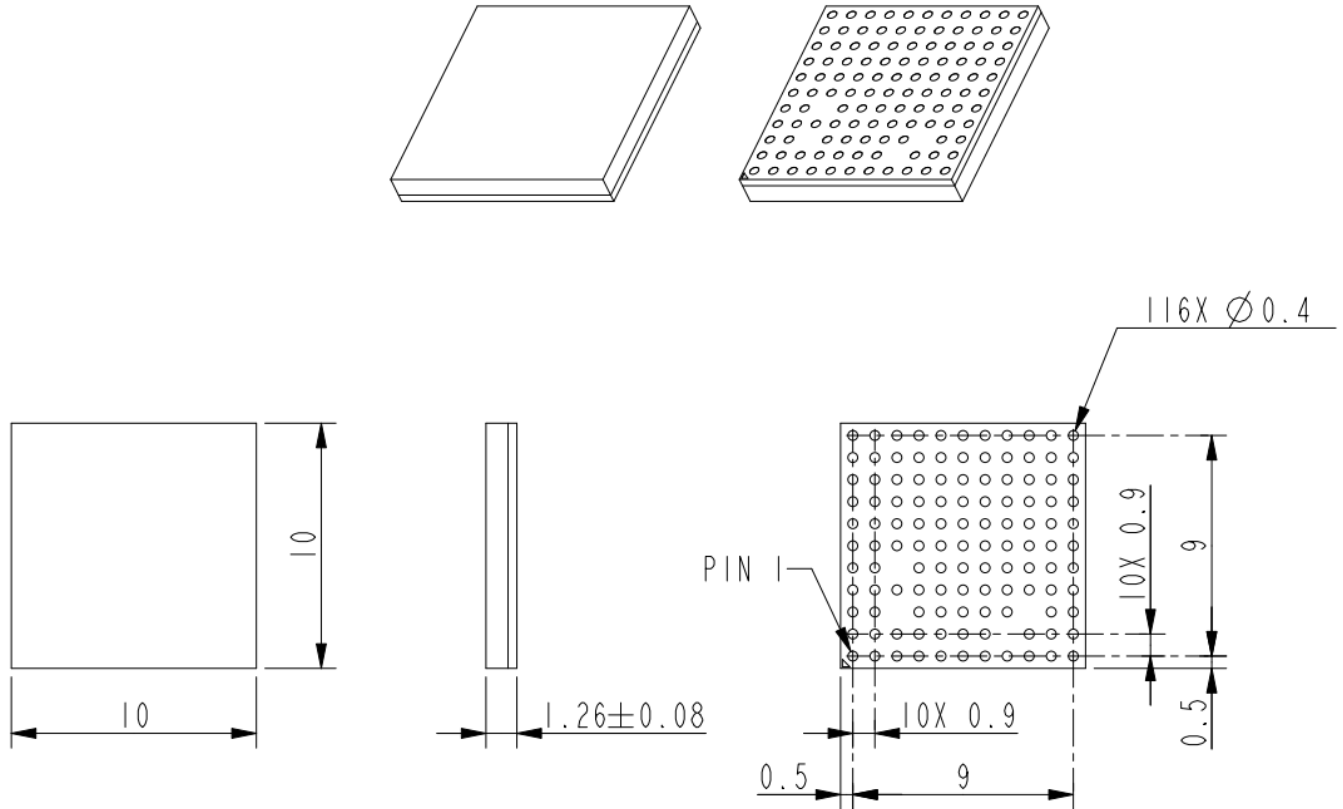

5. Packaging Information

1. One reel can pack 2,200pcs modules
2. One production label is pasted on the reel, one desiccant and one humidity indicator card are put on the reel

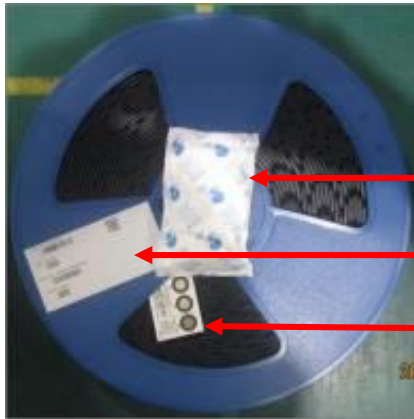

One desiccant

One production label


One humidity indicator card

3. One reel is put into the anti-static moisture barrier bag, and then one production label is pasted on the bag




One production label

4. A bag is put into the anti-static pink bubble wrap

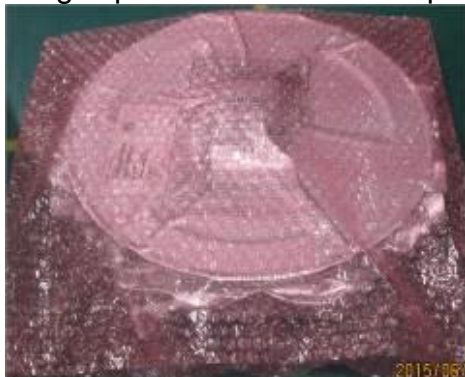

One anti-static pink bubble wrap

5. A bubble wrap is put into the inner box and then one label is pasted on the inner box

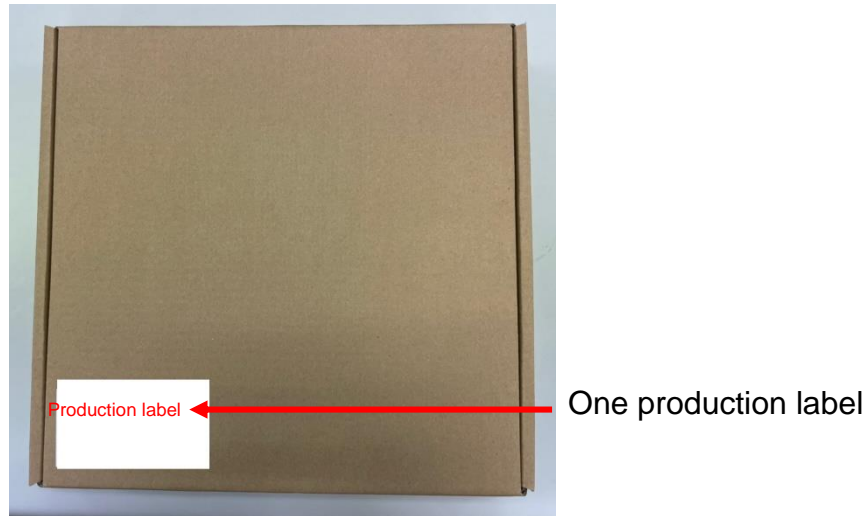

6. 5 inner boxes could be put into one carton



7. Sealing the carton by AzureWave tape



8. One carton label and one box label are pasted on the carton. If one carton is not full, one balance label pasted on the carton

One carton label



One box label

